

QUAD VALVE

PORT	FUNCTION	THREAD
(1)	SUPPLY	
21	CIRCUIT 1	M22x1.5 JED-388
22	CIRCUIT 2	M22x1.5 JED-388
23	CIRCUIT 3	M22x1.5 JED-388
24	CIRCUIT 4	M22x1.5 JED-388

AIR DRYER





PORT	FUNCTION	THREAD
1	FROM THE COMPRESSOR	M22x1.5
31 (12)	EXTERNAL FILLING - CLOSED	M16x1.5
21	TO THE RESERVOIRS	M22x1.5
22	TIRE INFLATION DEVICE - CLOSED	- B
3	EXHAUST FOR COMPRESSED AIR	-
4	TO THE COMPRESSOR - CLOSED	M12x1.5
6	HEATER PLUG	(3)

QUAD-VALVE		PRO 122 016 0			
PORTS		21	22	23	24
OPENING PRESSURE DYNAMIC	BAR	6.5 <sup>0</sup> <sub>-0,3</sub>	6.5 <sup>0</sup> <sub>-0,3</sub>	7.5 <sup>0</sup> <sub>-0,5</sub> B	6.5 <sup>0</sup> <sub>-0,3</sub>
CLOSING PRESSURE DYNAMIC	BAR	=>6.0			
CLOSING PRESSURE STATIC AT FAILURE OF CIRCUIT ....	BAR	0	=>5.0	(4)	=>5.0
		=>5.0	0	=>5.0	=>5.0
		=>5.0	=>5.0	0	=>5.0
		=>5.0	=>5.0	=>5.0	0

TECHNICAL DATA

COMBINED UNLOADER:

CUT OUT PRESSURE:	9.3±0.2 BAR
OPERATING RANGE:	OR=1.1±0.4 BAR
DYNAMIC PRESSURE OF THE SAFETY VALVE:	14.5 <sup>+4,5</sup> <sub>0</sub> bar (AT V <sub>n</sub> = 100 dm <sup>3</sup> /min) B
BACK FLOW LIMITING VALVE:	(0.5 x OR) ± 0.1 bar B
TORQUES FOR CONNECTIONS:	M12x1.5: Mmax = 21 Nm M16x1.5: Mmax = 34 Nm M22x1.5: Mmax = 53 Nm
THERMAL RANGE OF CONTINUOUS APPLICATION:	-20°C ... +65°C
RESISTANCE TO HEAT:	+75°C MAX
MEDIUM:	COMPRESSED AIR
WORKING PRESSURE:	P <sub>e</sub> max = 13 bar
MAX. PERMISSIBLE FREQUENCY:	50 Hz
MAX. PERMISSIBLE ACCELERATION:	±10 g
HEATING:	
HEATING CUT-IN TEMPERATURE:	7±6 °C
HEATING CUT-OFF TEMPERATURE:	29.5±3.0 °C
BATTERY VOLTAGE:	24.0 <sup>+4,8</sup> <sub>-2,4</sub> V DC
POWER WITHOUT CURRENT:	100 W

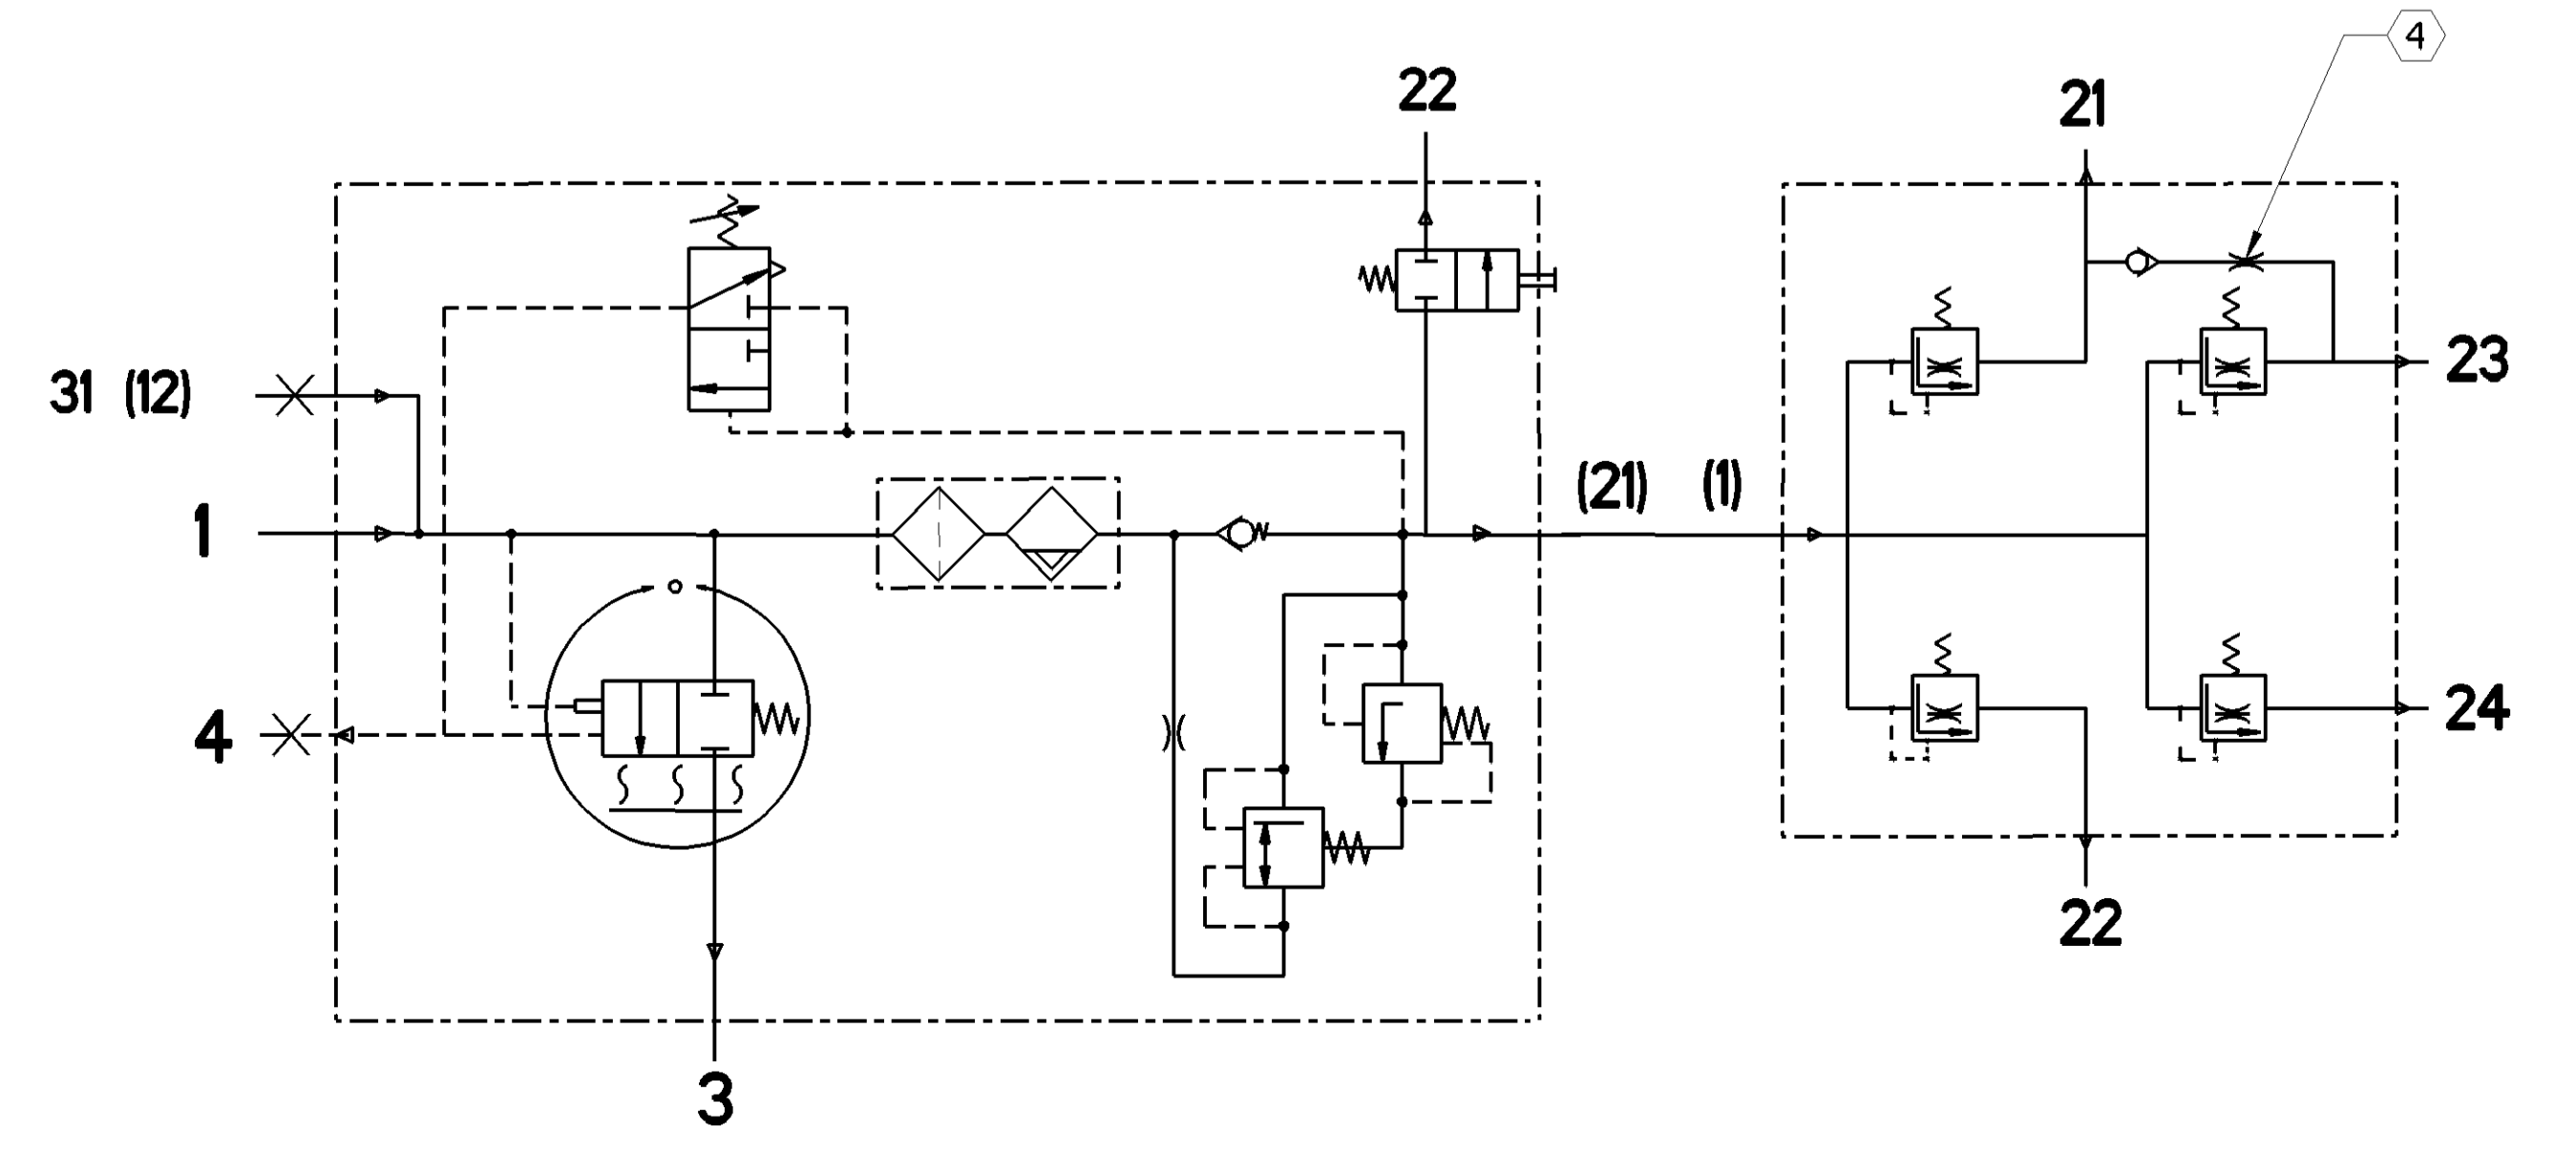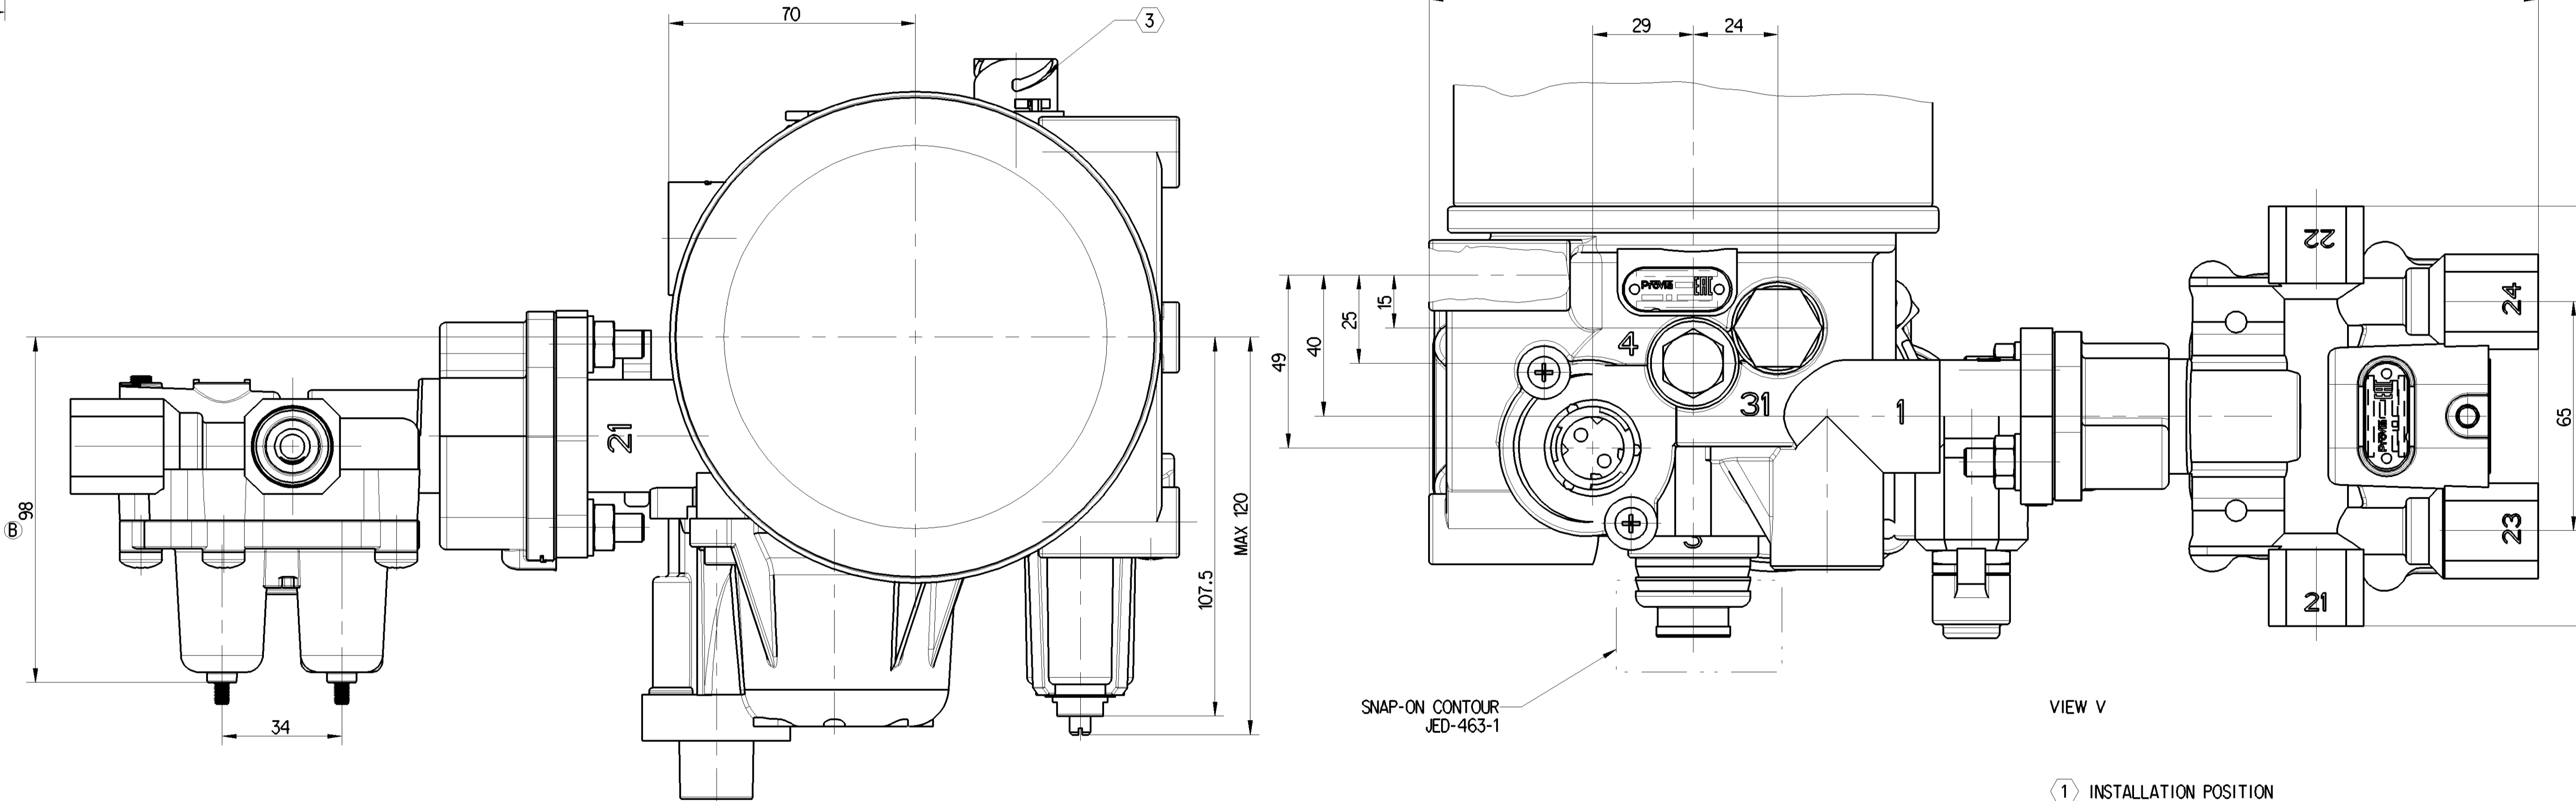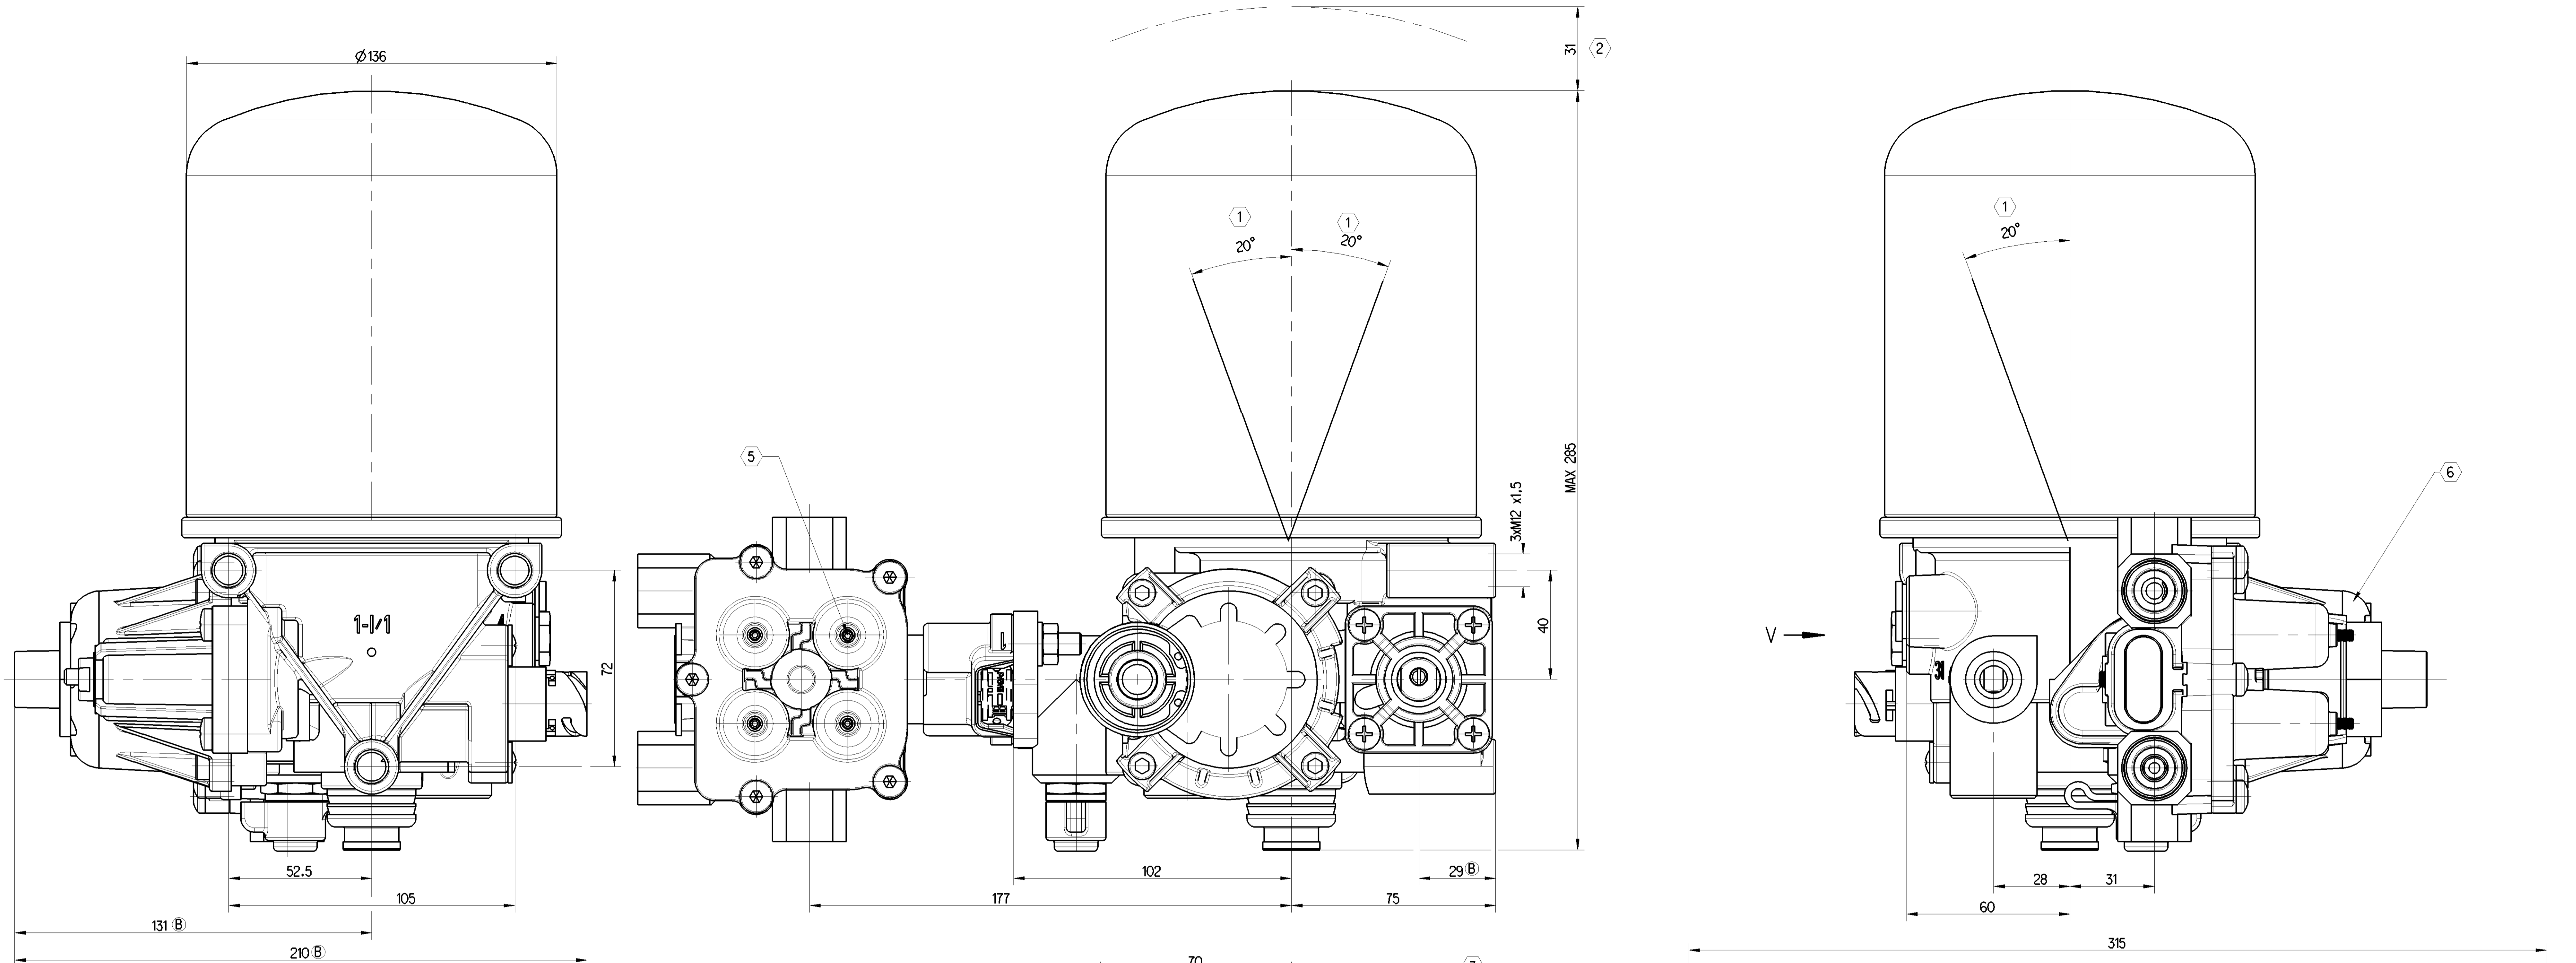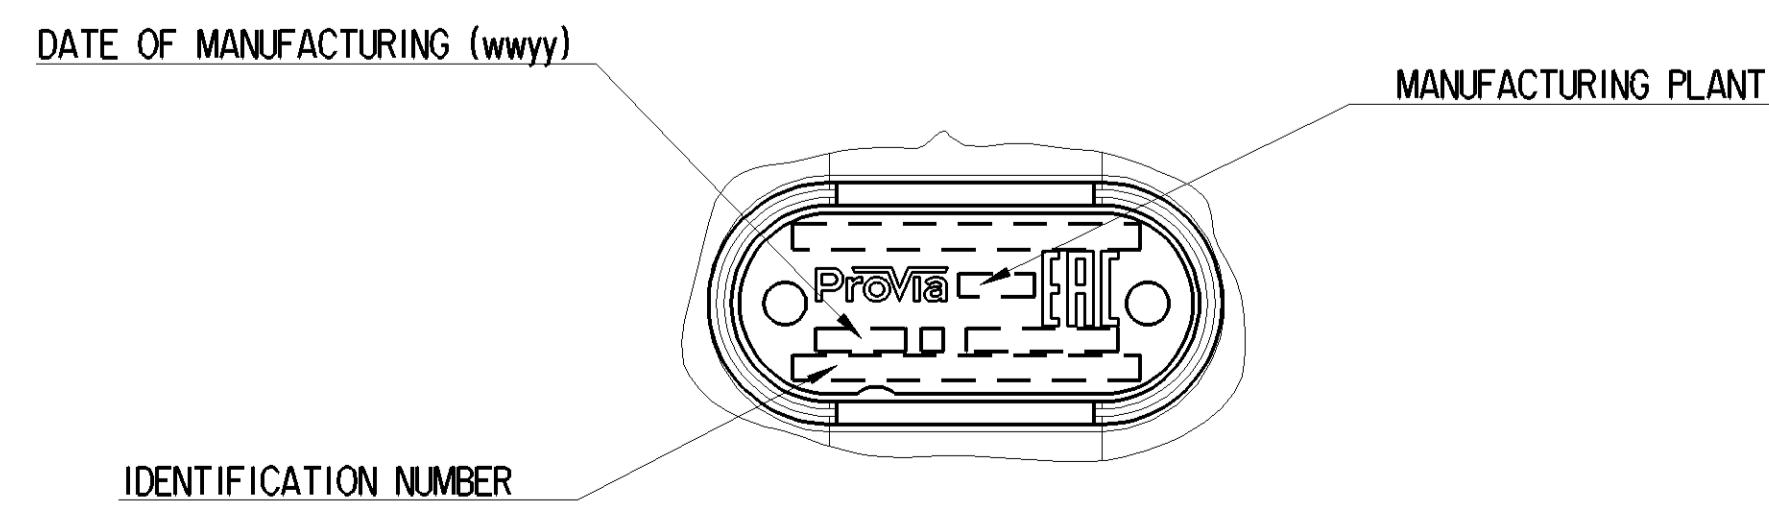

- ① INSTALLATION POSITION
- ② MOUNTING HEIGHT
- ③ CONNECTOR STECKVERBINDER ISO 15170-A1-2.1-1-Sv/K2
- ④ FLOW RATE = 16-35 l/min AT P23 = 8, P21 = 0 bar WHEN P21 DROPS TO ZERO RETAINED P23 = 1bar MAX
- ⑤ ADJUSTING SCREWS SECURED AGAINST TAMPERING WITH LOCTITE AFTER TEST
- ⑥ BACK FLOW LIMITING VALVE

General Specifications: JED-388-1.1, Size ISO 14405 LP		Copyright: 2020-11-29		Prövia	
Doc. Code: 035	Sheet: 1	To: 3	System: 2020-11-29	AIR PROCESSING UNIT	
Range of Nominal Dimensions (d in mm)		2020-12-01		MICROKAWCZ	
Class	1	2	3	4	5
Fine	0.5	1.0	1.5	2.0	3.0
Medium	1.0	2.0	3.0	4.0	5.0
Course	2.0	3.5	5.0	6.5	8.0
Tapped Holes acc.:		6.2		1:1	
Tolerance class: H7/g6		A 0		PRO 122 017 0	
Tolerance class: H7/g6		A 0		005 EN 1/1	