


<I> SAFETY CHARACTERISTICS	0
<I> SIGNIFICANT CHARACTERISTICS	0
<I> CUSTOMER INTERFACE	2

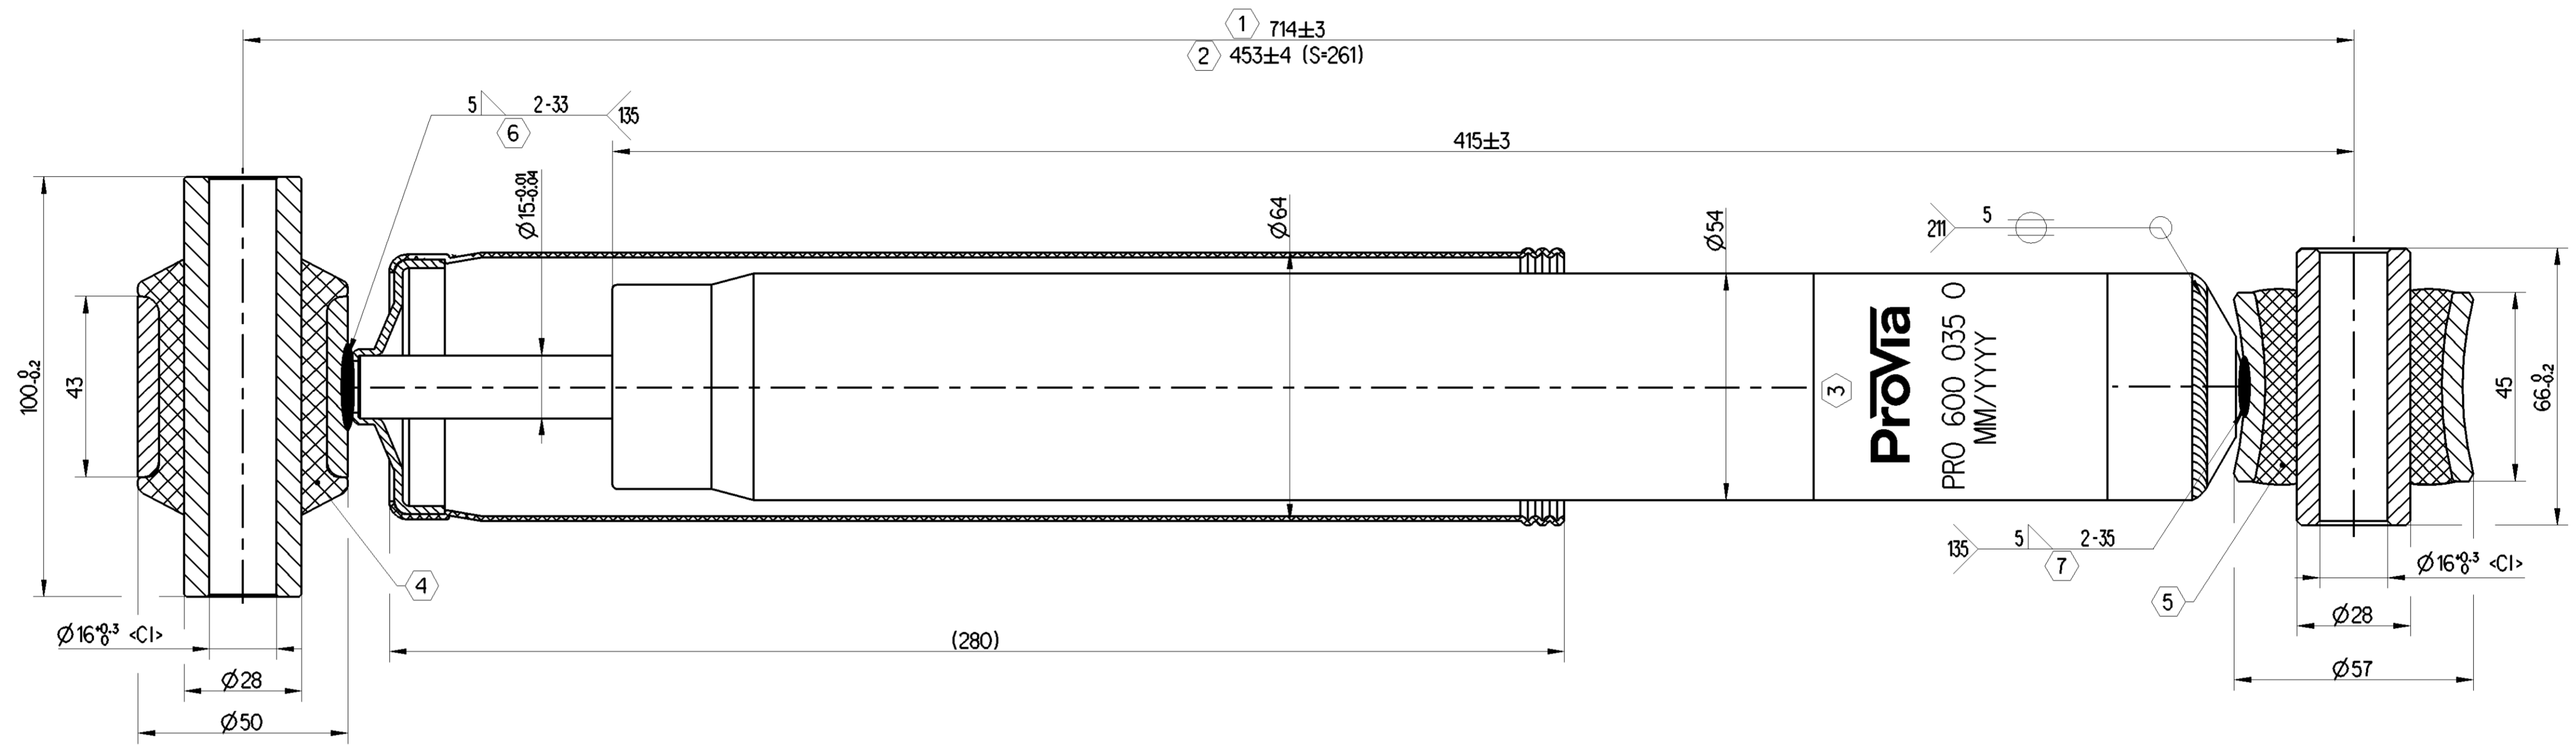

1	MAX.REBOUND LENGTH
2	MIN.COMPRESSION LENGTH
3	MARKING DETAILS PROVIA LOGO PROVIA PART NUMBER DATE OF MANUFACTURING
4	HARDNESS OF RUBBER PARTS 65-70 HS
5	HARDNESS OF RUBBER PARTS 60-70 HS
6	WELD STRENGTH 45KN
7	WELD STRENGTH 25KN
	COLOUR: RAL 9005B SEMI-BLACK

Resistance force table of SAMPLE criterion - HYDRAULIC

V (m/s)	0.052	0.131	0.262	0.393	0.524
Rebound (N)	1996	2598/4330	3970	4401	4332/5296
Compression (N)	451	532/888	845	969	989/1209
S (mm)			100		

General Specifications: ISO 8015, JED-334-1, Size ISO H4405 LP		Copyright WABCO®	
Further Technical Data: PRO 600 035 0		Date	Signature
Doc. Code: O35	Sheet: 1 To 7	2023-01-17	Saravanan
General Tolerances JED-261		2023-01-17	
Range of Nominal Dimensions (± mm)		Manivannan	
Class	1) ≤ 50	> 50	> 180
	±0.5	±1	±1.5
		±2	±4
			±6.5
Mass	3.9±1	Scale	1:1
Size	A 1	CAD System	CREO
Material No.		Date of first issue	2023-01-17
PRO 600 035 0		Doc.Code	005
		Language	EN
		Sheet	1/1
Ech.No.		Revision	Techn. Resp.
			696LAM
Tapped Holes acc. -		Replacement for	
1) Tolerance Class Applied Crossmarked			

Non è permesso copiare o riprodurre questo documento, né utilizzare il contenuto o i marchi contenuti in esso, senza permesso scritto dalla WABCO. È vietata espressamente la ristampa o l'uso non autorizzato. Toute réimpression ou utilisation non autorisée sans la permission écrite de la WABCO est formellement interdite. Toute réimpression ou utilisation non autorisée sans la permission écrite de la WABCO est formellement interdite.