


Touta Communication ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation expresse. Tout manquement a cette regle constitue un abus evident et expose son auteur au versement de dommages et interets. Tous droits de propriete industrielle reserves, notamment en matiere de brevets et de modeles.

Wedergebe sowie Vervielfaltigung dieser Unterlagen, Vervielfachung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen stellen einen offensichtlichen Missbrauch dar und verpflichten zu Schadenersatz. Alle Rechte fuer den Fall der Patentierung oder Gebrauchsmuster-Eintragung vorbehalten.

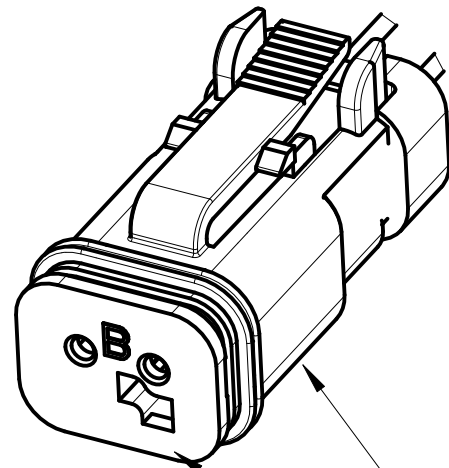


CONNECTOR: GRAY

CODING B (BLACK)



THERMAL RANGE OF APPLICATION

- I -40°C...+200°C
+210°C[1h]
- II -40 °C...+150°C
+180°C[1h]
- III -40°C...+150°C
- IV -40°C...+120°C
- V N/A
- VI -40°C...+130°C
- VII -40°C...+125°C
- VIII N/A


AREA TO BE GREASED

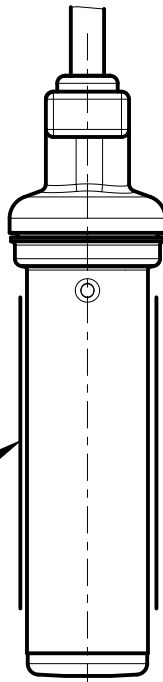

BEFORE ASSEMBLY VIEW

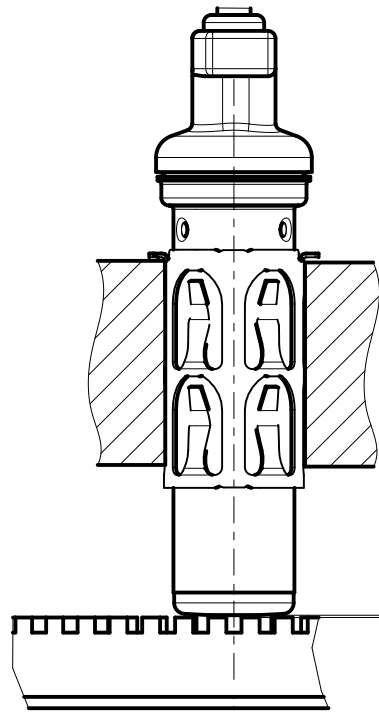

ASSEMBLY VIEW (IN VEHICLE)



Clamping bush

PRO 503 062 4

Additional equipment		
Name	Number	QTY
Clamping bush	-	1
Grease	PRO 503 062 4	1

General Specification: ISO 8015, JED-334-1, Size ISO 14405 LP						
Further Technical Data: Product Specification						
Doc. Code: O35			Sheet: 1 To 7			
General Tolerances JED-261						
		Range of Nominal Dimensions (± mm)				
Class	1)	≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400	∇
Fine		±0.5	±1	±1.5	±2	±3°
Medium		±1	±2	±3	±4	
Coarse	X	±2	±3.5	±5	±6.5	
Tapped Holes acc. -						
1) Tolerance Class Applied Crossmarked						

Copyright ZF®		
Date	Drawn	Signature
2025-05-09		Blazejak
Checked		
2025-05-13	Pakula	
Dimensions in mm		
Mass	Scale	PP
0.12 kg	NTS	
Size	CAD System	
A 2	CREO	

ProVia					
Inductive Sensor (ABS)					
Date of first issue: 2025-05-13					
Doc.Code	005	Language	EN	Sheet	1/1
Replacement for					

dw: PRO0320640_0037 version: -2 / state: Draft Review / mdt: PRO0320640_0037