

Non è permesso cedere, a terzi o riprodurre questo documento, né utilizzare il contenuto o renderlo comunque noto a terzi senza autorizzazione esplicita. Ogni infrazione costituisce un evidente abuso e comporterà il risarcimento dei danni subiti. E' fatta riserva di tutti i diritti derivanti da brevetti o modelli.


Tout communication ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation expresse. Tout manquement à cette règle constitue un abus évident et expose son auteur au versement de dommages et intérêts. Tous droits de propriété industrielle réservés, notamment en matière de brevets et de modèles.

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung ihres Inhalts ist nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen stellen einen offensichtlichen Missbrauch dar und verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patentierung oder Gebrauchsmuster-Eintragung vorbehalten.


THERMAL RANGE OF APPLICATION

- I -40°C...+200°C
+210°C[1h]
- II -40 °C...+150°C
+180°C[1h]
- III -40°C...+150°C
- IV -40°C...+120°C
- V N/A
- VI -40°C...+130°C
- VII -40°C...+125°C
- VIII N/A


- 1 ABRASION-RESISTANT LASER PRINTING.
TEXT VISIBLE AGAINST THE BACKGROUND.
- 2 DEGREE OF PROTECTION (SENSOR HEAD): 6K9K
- 3 MINIMUM CABLE BEND RADIUS: R 15

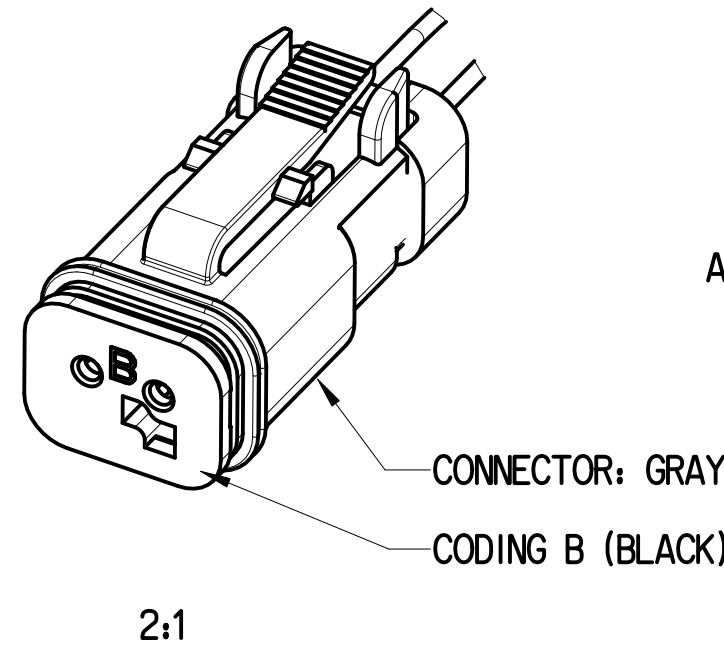

AREA TO BE GREASED

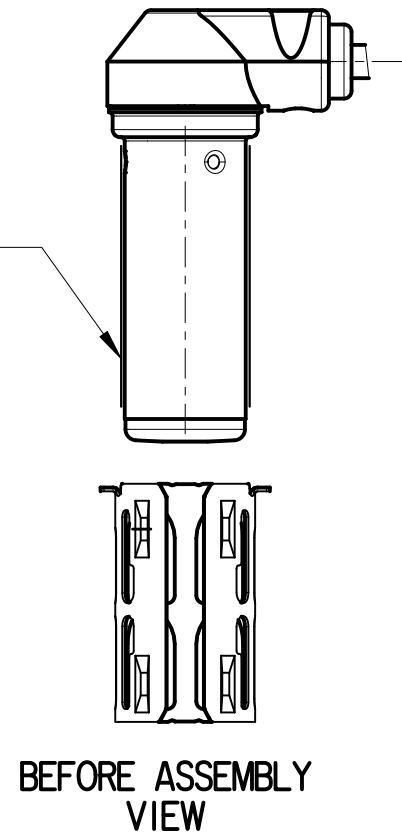

BEFORE ASSEMBLY VIEW

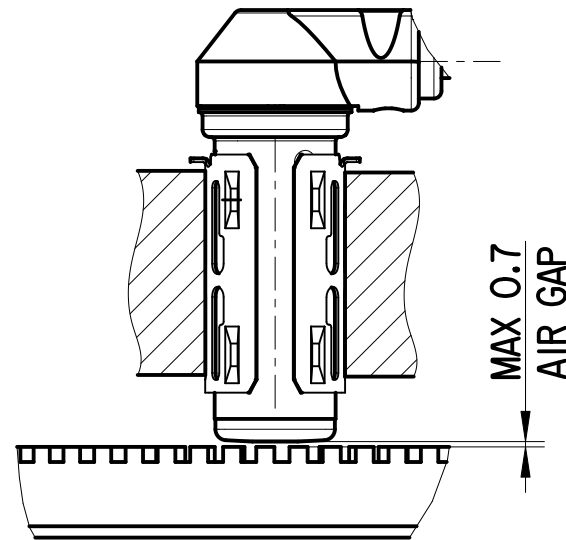

ASSEMBLY VIEW (IN VEHICLE)

Clamping bush

PRO 503 062 4

Additional equipment		
Name	Number	QTY
Clamping bush	-	1
Grease	PRO 503 062 4	1

General Specification: ISO 8015, JED-334-1, Size ISO 14405 LP						
Further Technical Data: Product Specification						
Doc. Code: 035			Sheet: 1 To 7			
General Tolerances JED-261						
		Range of Nominal Dimensions (± mm)				
Class	1)	≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400	
Fine		±0.5	±1	±1.5	±2	
Medium		±1	±2	±3	±4	
Coarse	X	±2	±3.5	±5	±6.5	
Tapped Holes acc. -						
1) Tolerance Class Applied Crossmarked						

Copyright ZF®		ProVia Inductive Sensor (ABS)					
Date	Signature						
Drawn							
2025-05-09	Blazejak						
Checked							
2025-05-13	Pakula						
Dimensions in mm							
Mass	Scale	Material No.			Date of first issue: 2025-05-13		
0.11 kg	NTS	PRO 032 066 0			Doc.Code	Language	Sheet
Size	CAD System				005	EN	1/1
A 2	CREO		ECN-No.	Revision	Techn. Resp.	Replacement for	
			-	-	6310_AM		

ProVia

Inductive Sensor (ABS)

FONT HEIGHT 2,2 mm
(CAPITAL LETTERS ONLY)

PROVIA-8.8 JED-868

WW/YY MADE IN GERMANY PRO 032 066 0

IN FORMAT WW/YY
ACCORDING TO JED-226

PART NO

A
2:1

100mm