


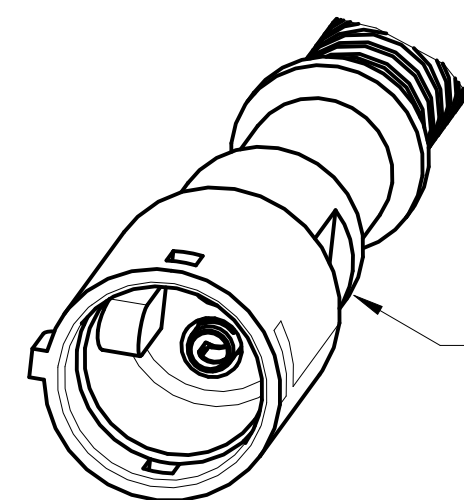

2:1

A line drawing of a hand tool, possibly a screwdriver or a similar instrument. It features a long, cylindrical handle with a dashed vertical line down the center. The handle has a small circular detail near the top. The tool is topped with a head that has a flat, rectangular face and a rounded, bulbous end. A small, rectangular protrusion is visible on the side of the head.

MAX 0.7
AIR GAP

ProVia WW/YY MADE IN GERMANY PRO 032 071 0

PART NO 1


A
2:1

- 40°C...+200°C
+210°C[1h]
- 40°C...+150°C
+180°C[1h]
- 40°C...+150°C
- 40°C...+140°C
- 40°C...+125°C
- 40°C...+105°C

—PRO 503 062 4

3 MINIMUM CABLE BEND RADIUS: R15

General Specification: ISO 8015, JED-334-1, Size ISO 14405 LP						
Further Technical Data: Product Specification						
Doc. Code: Q35			Sheet: 1		To 7	
General Tolerances JED-261						
Class 1)		Range of Nominal Dimensions (± mm)				
		≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400	
Fine		±0.5	±1	±1.5	±2	±3
Medium		±1	±2	±3	±4	
Coarse	X	±2	±3.5	±5	±6.5	
Tapped Holes acc. -						
1) Tolerance Class Applied Crossmarked						

Copyright ZF®					
Date	Signature				
Drawn					
2025-05-12	Blazejak				
Checked					
2025-05-13	Pakula	Inductive Sensor (ABS)			
Dimensions in mm					
Mass	Scale	Material No.		Date of first issue: 2025-05-12	
0.1 kg	NTS	PRO 032 071 0		Doc.Code	Language
				005	EN
Size	CAD System			Sheet	
A 2	CREO			005	1/1
		ECN-No.	Revision	Techn. Resp.	Replacement for
		-	-	6310_AM	