

Non e permesso consegnare a terzi o riprodurre questo documento, ne utilizzare il contenuto a renderlo comunque noto a terzi senza autorizzazione espressa. Ogni infrazione costituisce un evidente abuso e comportera il risarcimento dei danni subiti. E' fatta riserva di tutti i diritti derivanti da brevetti o modelli.

Tout Communication ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation expresse. Tout manquement a cette regle constitue un abus evident et expose son auteur au versement de dommages et interets. Tous droits de propriete industrielle reserves, notamment en matiere de brevets et de modesles.

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung ihres Inhalts ist nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen stellen einen offensichtlichen Missbrauch dar und verpflichten zu Schadensersatz. Alle Rechte für den Fall der Patentierung oder Gebrauchsmuster-Eintragung vorbehalten.

DEGREE OF PROTECTION (IN CONNECTION WITH PLUG) : IP68/6K9K

MATERIAL:
INSULATION PVC(-40°C....+80°C)
JACKET PVC(-40°C....+80°C)





RESISTANT TO: AIR, WATER, MINERAL OIL, PETROL, DIESEL OIL, SALT SPRAY

VOLTAGE : 24V

INSTALLATION INSTRUCTIONS FOR CABLES TO BE OBSERVED WITH : 449 000 000 (DOC. CODE 011)

FIELD OF APPLICATION : TRAILER

<I> SAFETY CHARACTERISTICS	0
<I> SIGNIFICANT CHARACTERISTICS	0
<I> CUSTOMER INTERFACE	0

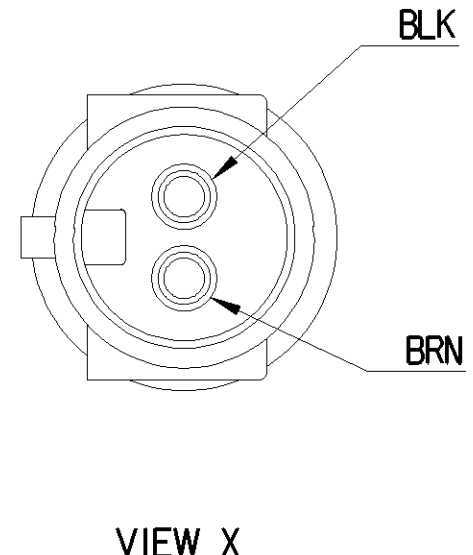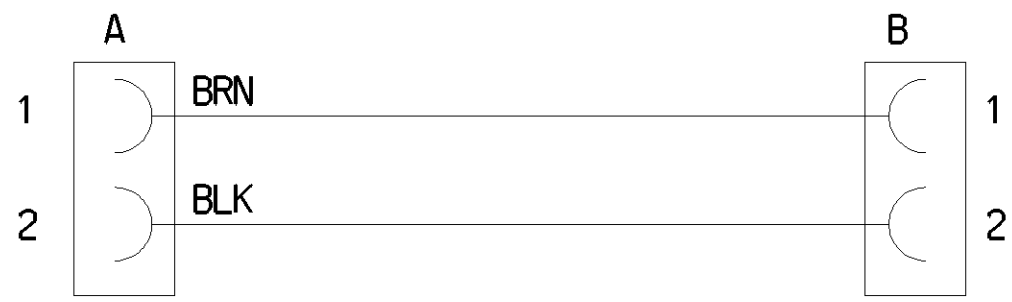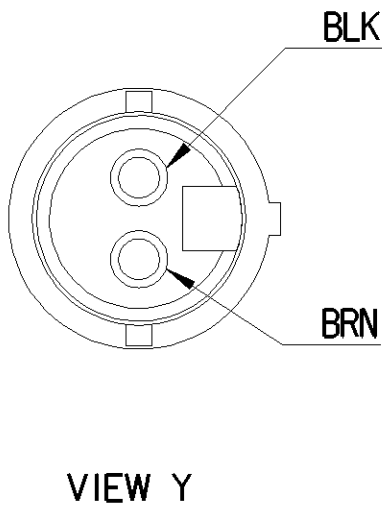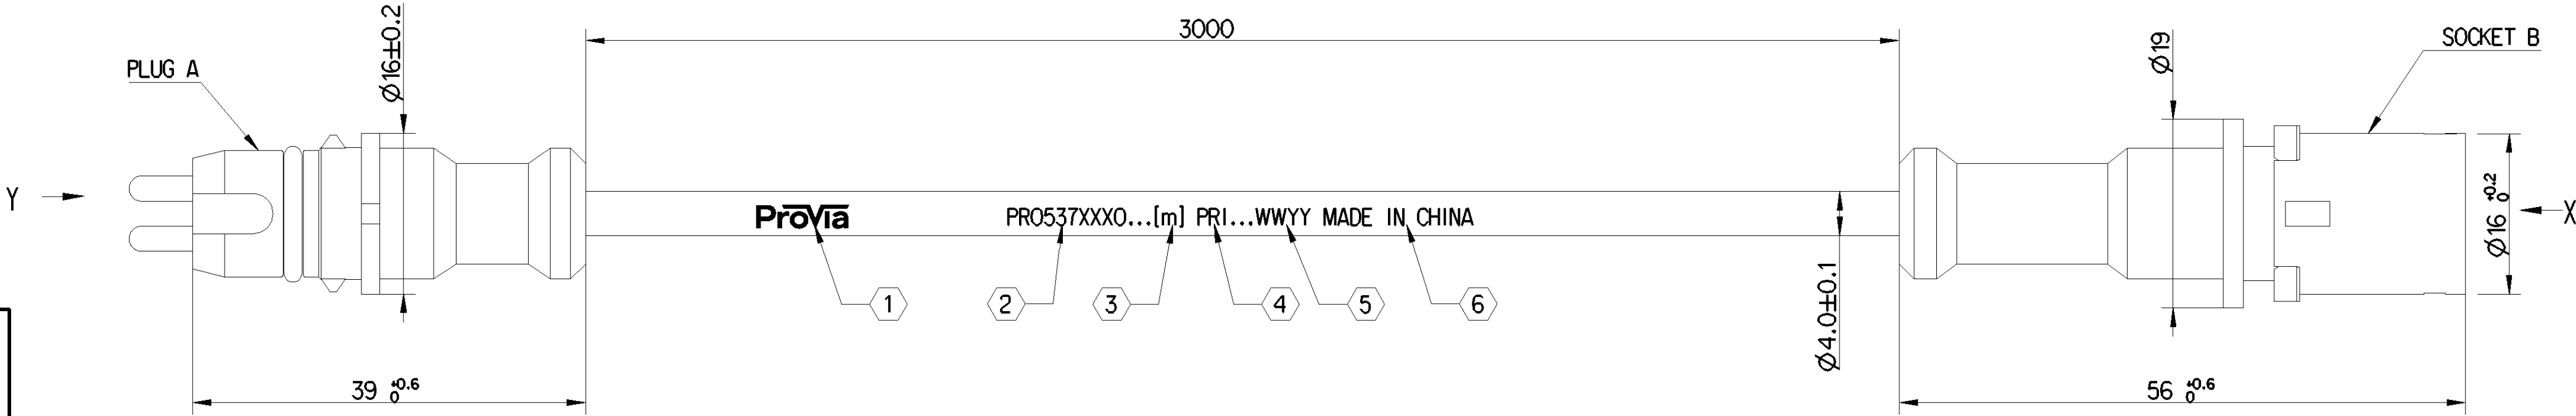

- 1 PROVIA LOGO
- 2 PROVIA IDENTIFICATION NUMBER PRO 537 XXX 0
- 3 LENGTH OF THE CABLE L[m]
- 4 MANUFACTURING IDENTIFICATION
- 5 WEEK AND YEAR OF MANUFACTURE
- 6 IDENTIFICATION OF COUNTRY OF ORIGIN

General Specification: ISO 8015, JED-334-1, Size ISO 14405 LP						Copyright ZF®		ProVia CABLE WITH CONNECTER PLUG/SOCKET					
Further Technical Data: PRO 537 004 0						Date						Signature	
Doc. Code:035			Sheet: 1 To 2			Drawn						Vignesh	
General Tolerances JED-261						Checked						Manivannan	
Range of Nominal Dimensions (± mm)						2023-12-19						Manivannan	
Class 1)		≤ 50		> 50 ≤ 180		> 180 ≤ 400		> 400		△			
Fine		±0.5		±1		±1.5		±2		±3°			
Medium		±1		±2		±3		±4					
Coarse		±2		±3.5		±5		±6.5					
Tapped Holes acc. -						Mass		Scale		Material No.			
1) Tolerance Class Applied Crossmarked						kg		NTS		PRO 537 004 0			
A 2						Size		CAD System		ECN-No.			
CREO						[Symbol]		[Symbol]		Revision			
										Techn. Resp.			
										Replacement for			
										Doc.Code			
										Language			
										Sheet			
										005			
										EN			
										1/1			
										6390_AM			