



PIN
KONTAKTSTIFT
BROCHE
SPINA

SOCKET
KONTAKTBUCHSE
SOCLE DE CONTACT
BOCCOLA DI CONTATTO

Q1
Q2
Q

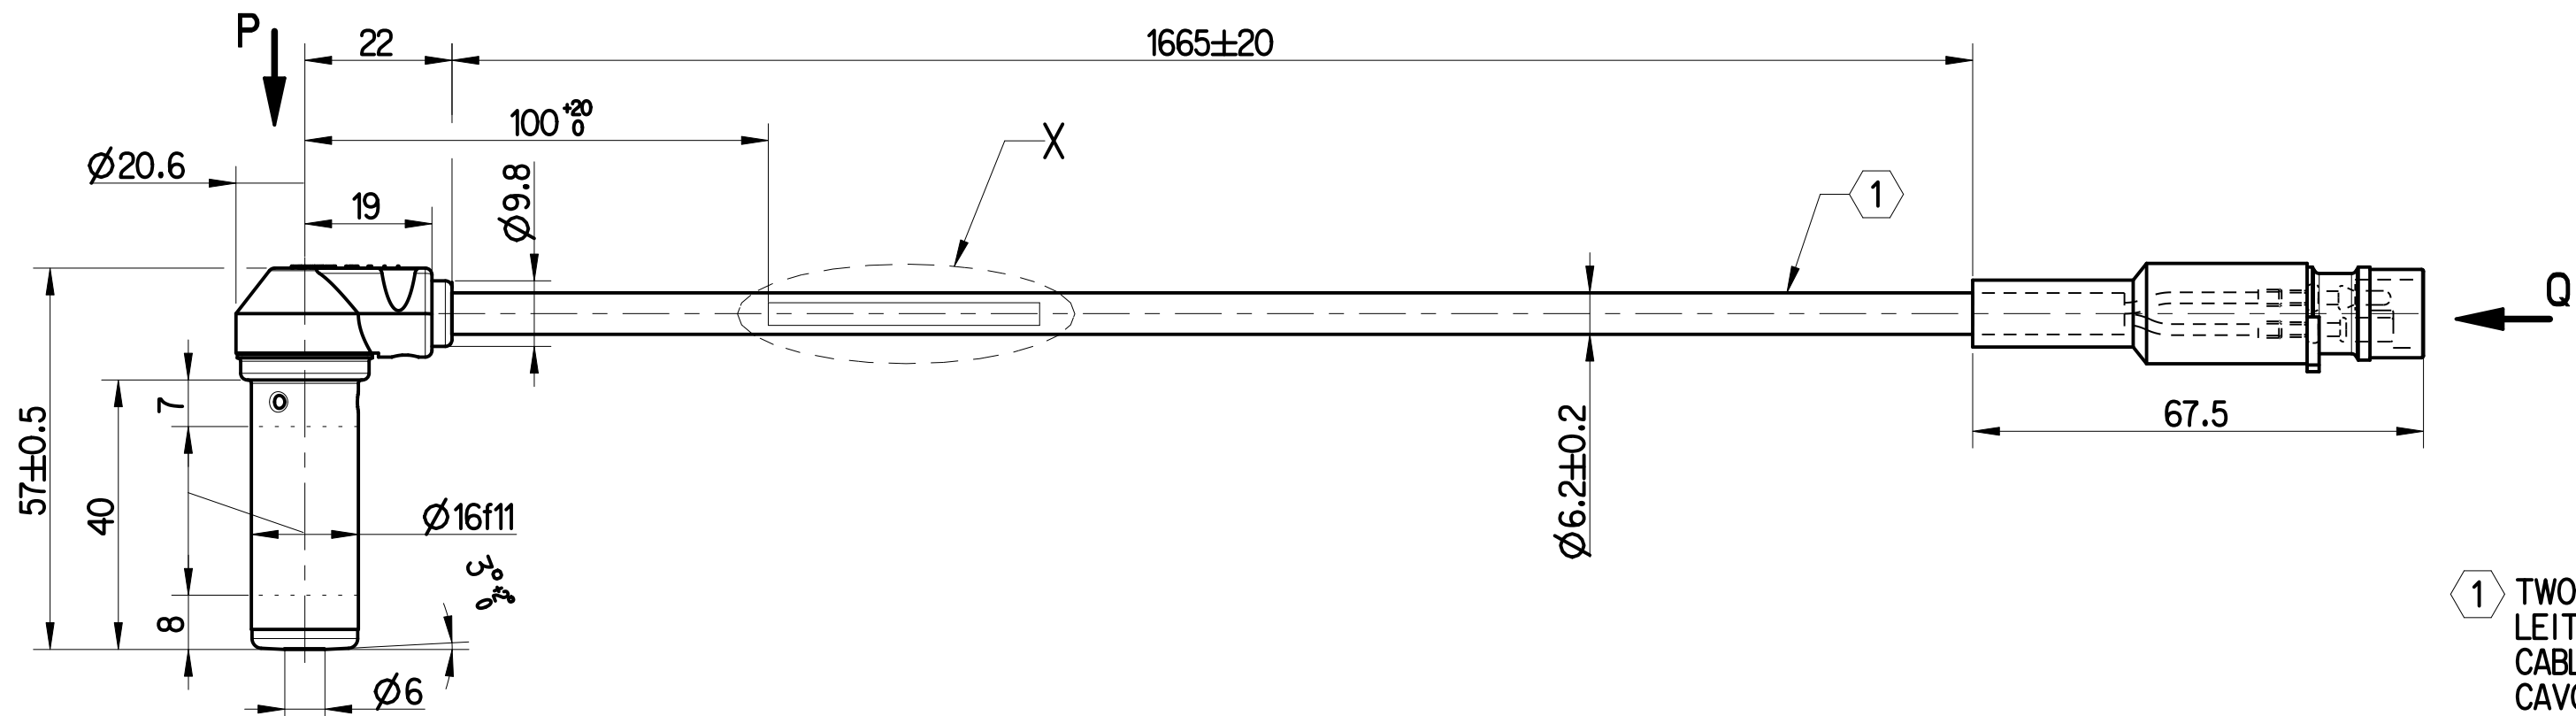

DATE OF MANUFACTURE
HERSTELLDATUM + HT
DATE DE FABRICATION
DATA DI FABBRICAZIONE

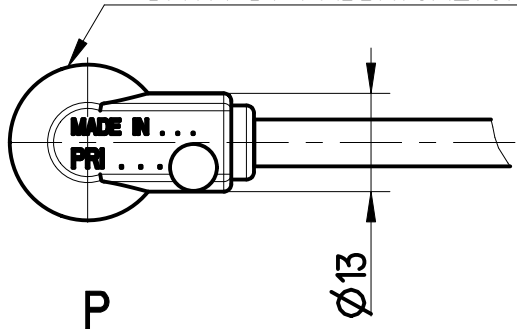

PROVIA-8.8 ...16-JED-868 2



$\triangle E$ X
2:1

PART NO. 
TEILE NR.
NO. DE PIECE
CODICE

1 TWO CORE CABLE
LEITUNG ZWEIADRIK
CABLE A DEUX CONDUCTEURS
CAVO A DUE CONDUTTORI

THERMORAD
2x0.96mm²

STRAIN RELIEF CABLE
ZUGENTLASTUNG KABEL
ARRET DE CABLE
SCARICO DI TRAZIONE DEL CAVO

MAX.50N $\vartheta = 20^{\circ}\text{C}$

BEND RADIUS CABLE
BIEGERADIUS KABEL
RAYON DE COURBURE DE CABLE
RAGGIO DI CURVATURA DEL CAVO

R 15 MIN, $\angle 90^\circ$

2 ABRASION RESISTANT PRINT
ABRIEBFESTER AUFDRUCK
IMPRESSION RESISTANTE A L' ABRASION
IMPRONTA RESISTENTE ALL' ABRASIONE

RAL 9001

DEGREE OF PROTECTION
SCHUTZART
DEGRE DE PROTECTION
GRADO DI PROTEZIONE

IP 68
ISO 20653

THERMAL RANGE OF APPLICATION FOR SENSOR
THERMISCHER ANWENDUNGSBEREICH FÜR SENSOR
GAMME D'APPLICATION THERMIQUE POUR SENSOR
CAMPO TERMICO D'APPLICAZIONE DEL SENSORE

-40 °C...+150 °C
+180 °C[1h]

THERMAL RANGE OF APPLICATION FOR CABLE
 THERMISCHER ANWENDUNGSBEREICH FÜR KABEL
 GAMME D'APPLICATION THERMIQUE POUR CÂBLE
 CAMPO TERMICO D'APPLICAZIONE DEL CAVO

-40 °C...+180 °C
+220 °C [1h]

THERMAL RANGE OF APPLICATION FOR PLUG
 THERMISCHER ANWENDUNGSBEREICH FÜR STECKER
 GAMME D'APPLICATION THERMIQUE POUR FICHE
 CAMPO TERMICO D'APPLICAZIONE DEL SPINA


-40 °C...+125 °C

FURTHER TECHNICAL DATA SEE PRODUCT SPECIFICATION
WEITERE TECHNISCHE DATEN SIEHE PRODUKT SPEZIFIKATION
AUTRES DONNEES TECHNIQUES VOIR PRODUCT SPECIFICATION
ULTERIORI DATI TECNICI VEDERE SPECIFICA DI PRODOTTO

PRO 032 005 0

INSTRUCTIONS OF INSTALLATION SEE ADAPTATION SPECIFICATION
EINBAUHINWEISE SIEHE ADAPTIONS-SPEZIFIKATION
INSTRUCTIONS D'INSTALLATION VOIR SPECIFICATION D'ADAPTION
ISTRUZIONI D'INSTALLAZIONE VEDERE SPECIFICA D'ADATTAMENTO

341 032 000 0

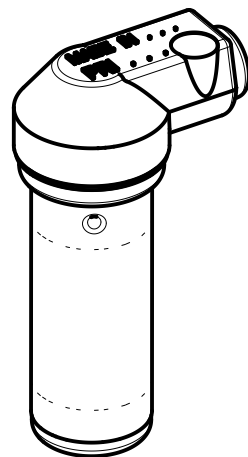

1:1

General Specification: ISO 8015, JED-334-1, Size ISO 14405 LP					Copyright WABCO®		ProVia INDUCTIVE SENSOR WITH PLUG STABSSENSOR MIT STECKER CAPTEUR AVEC FICHE SENSORE INDUTTIVO CON SPINA				
Further Technical Data: PRO 032 005 0					Date					Signature	
Doc. Code: 035		Sheet: 1 To 4			Drawn					Vignesh	
General Tolerances JED-261					Checked					Manivannan	
Range of Nominal Dimensions (± mm)					2023-04-06		Vignesh				
					2024-01-24		Manivannan				
					Dimensions in mm						
					Mass		Scale		Material No.		
					0.140 kg		1:1 (2:1)		PRO 032 005 0		
					Size		CAD System		Date of first issue: 2016-05-15		
					A 2		CREO		Doc.Code Language Sheet		
									005 ML 1/1		
Tapped Holes acc.									ECN-No. Revision Techn. Resp.		
1) Tolerance Class Applied Crossmarked									Replacement for		
									509392 1x E 6310_AM -		