


1 ABRASION RESISTANT PRINT
ABRIEBFESTER AUFDRUCK
IMPRESSION RESISTANTE A L' ABRASION
IMPRONTA RESISTENTE ALL' ABRASIONE

DEGREE OF PROTECTION (IN CONNECTION WITH CONNECTOR)
SCHUTZART (IN VERBINDUNG MIT GEGENSTECKER)
DEGRE DE PROTECTION (DANS CONNECTION AVEC CONNECTEUR)
GRADO DI PROTEZIONE (IN COLLAGAMENTO CON CONNETTORE)

} IP 68, IP 6K9K
(ISO 20653)

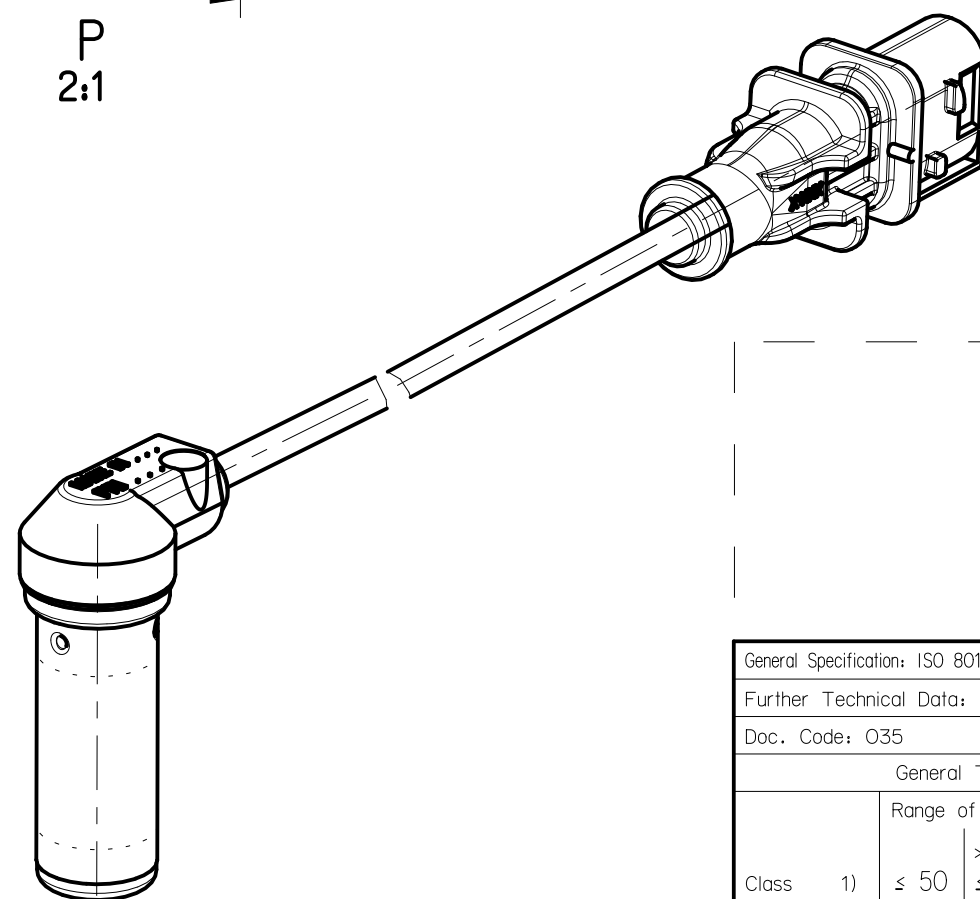

General Specification: ISO 8015, JED-334-1, Size ISO 14405 LP										Copyright WABCO®										ProVia INDUCTIVE SENSOR WITH HDSCS PLUG STABSENSOR MIT HDSCS-STECKER CAPTEUR AVEC CONNECTEUR HDSCS SENSORE INDUTTIVO CON SPINA HDSCS																								
Further Technical Data: PRO 032 007 0										Date					Signature																													
Doc. Code: O35					Sheet: To					Drawn					Vignesh																													
General Tolerances JED-261										Checked					Manivannan																													
Range of Nominal Dimensions (± mm)										Dimensions in mm										Material No. PRO 032 007 0 ECN-No. 509392 Revision 1x B Techn. Resp. 6310-AM																								
Class 1) ≤ 50 > 50 ≤ 180 > 180 ≤ 400 > 400										Mass					Scale															Date of first issue: 2006-05-18														
Fine ±0.5 ±1 ±1.5 ±2										0.094 kg					1:1 (2:1)															Doc.Code					Language					Sheet				
Medium ±1 ±2 ±3 ±4										Size					CAD System															005					ML					1/1				
Coarse X ±2 ±3.5 ±5 ±6.5										A 2					CREO															Replacement for					-									
Tapped Holes acc.																																												
1) Tolerance Class Applied Crossmarked																																												