

Touta Communication ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation expresse. Tout manquement à cette règle constitue un abus évident et expose son auteur au versement de dommages et intérêts. Tous droits de propriété industrielle réservés, notamment en matière de brevets et de modèles.

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung ihres Inhalts ist nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen stellen einen offensichtlichen Missbrauch dar und verpflichten zur Schadenersatz. Alle Rechte für den Fall der Patentierung oder Gebrauchsmuster-Eintragung vorbehalten.

Non è permesso consegnare o terzi o riprodurre questo documento, né utilizzare il contenuto o renderlo comunque noto a terzi senza autorizzazione esplicita. Ogni infrazione costituisce un evidente abuso e comporterà il risarcimento dei danni subiti. È fatta riserva di tutti i diritti derivanti da brevetti o modelli.

Copying of this document and giving it to others and the use or communication of the contents hereof, are forbidden without express authority. Contravention of this restriction will constitute an evident abuse and result in a liability to the payment of damages. All rights are reserved in the event of the grant of patent or registration of a utility model or design. This document is the subject of copyright.

A


B

DATE OF MANUFACTURE
HERSTELLDATUM + HT
DATE DE FABRICATION
DATA DI FABBRICAZIONE

B

B

B

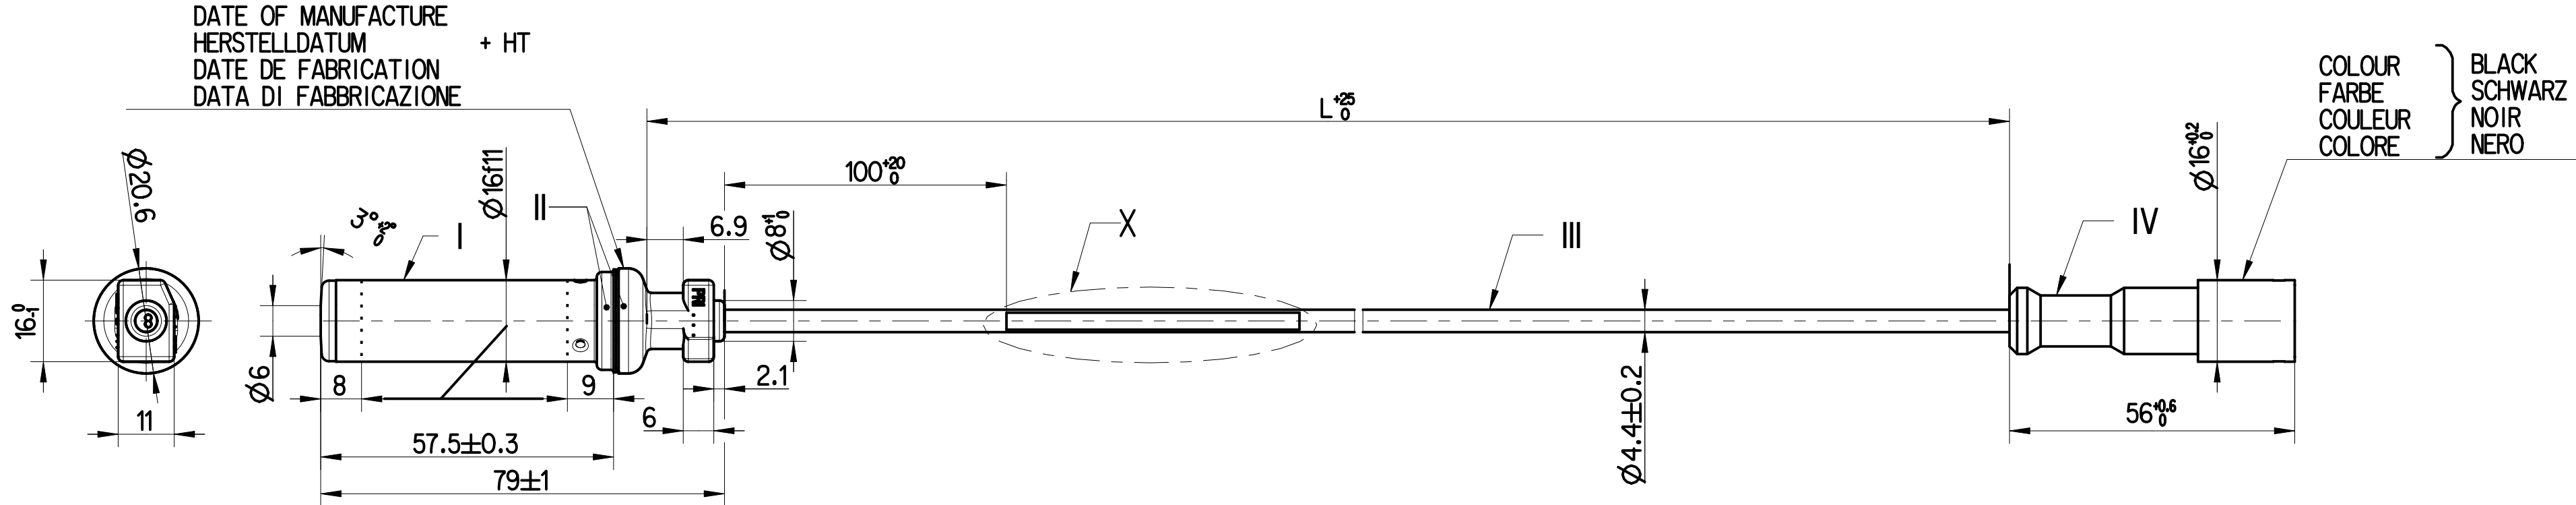

THERMAL RANGE OF APPLICATION
THERMISCHER ANWENDUNGSBEREICH
GAMME D'APPLICATION THERMIQUE
CAMPO TERMICO D'APPLICAZIONE

I -40 °C...+200 °C[1000h]
II -40 °C...+160 °C
III -40 °C...+180 °C
IV -40 °C...+80 °C

1 ABRASION RESISTANT PRINT
ABRIEBFESTER AUFDUCK
IMPRESSION RESISTANTE A L' ABRASION
IMPRONTA RESISTENTE ALL' ABRASIONE

RAL 9001

FURTHER TECHNICAL DATA SEE PRODUCT SPECIFICATION
WEITERE TECHNISCHE DATEN SIEHE PRODUKT SPEZIFIKATION
AUTRES DONNEES TECHNIQUES VOIR PRODUCT SPECIFICATION
ULTERIORI DATI TECNICI VEDERE SPECIFICA DI PRODOTTO


PRO 032 009 0

INSTRUCTIONS OF INSTALLATION SEE ADAPTATION SPECIFICATION
EINBAUHINWEISE SIEHE ADAPTION-SPEZIFIKATION
INSTRUCTIONS D'INSTALLATION VOIR SPECIFICATION D'ADAPTION
ISIRUZIONI D'INSTALLAZIONE VEDERE SPECIFICA D'ADATTAMENTO


341 032 000 0

DEGREE OF PROTECTION (IN CONNECTION WITH PLUG)
SCHUTZART (IN VERBINDUNG MIT KUPPLUNGSSTECKER)
DEGRE DE PROTECTION (DANS CONNECTION AVEC CONNECTEUR MALE)
GRADO DI PROTEZIONE (IN COLLAGAMENTO CON SPINOTTO)

IP 6K9K
ISO 20653

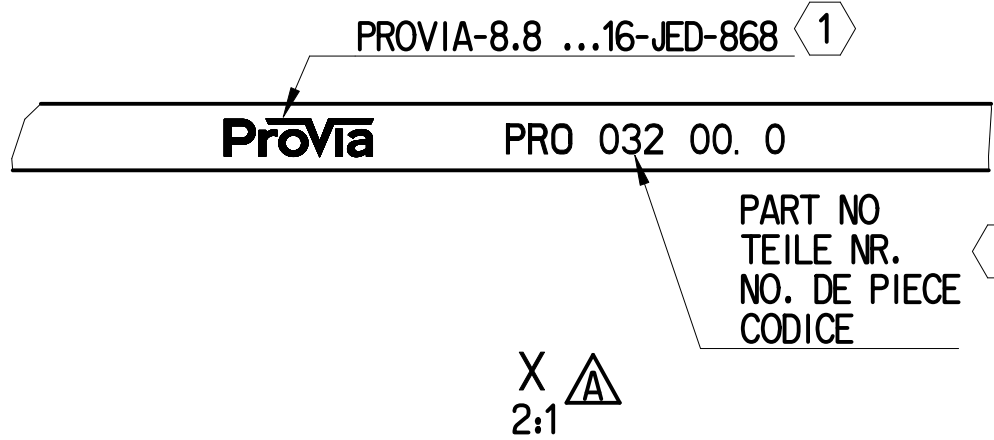

PROVIA -NO.	L (mm)	MASS (kg)
PRO 032 009 0	294	0.070
PRO 032 010 0	1700	0.089

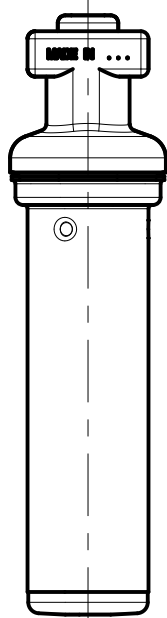

1:1

SAFETY CHARACTERISTICS	0
SIGNIFICANT CHARACTERISTICS	0
CUSTOMER INTERFACE	0

TWO CORE CABLE
LEITUNG ZWEIADRIG
CABLE A DEUX CONDUCTEURS
CAVO A DUE CONDUTTORI

THERMORAD
2x0.5mm²
ASC 77799

STRAIN RELIEF CABLE
ZUGENTLASTUNG KABEL
ARRET DE CABLE
SCARICO DI TRAZIONE DEL CAVO

MAX.50N ∠=20°C

BEND RADIUS CABLE
BIEGERADIUS KABEL
RAYON DE COURBURE DE CABLE
RAGGIO DI CURVATURA DEL CAVO

R 15 MIN, ∠ 90°

General Specification: ISO 8015, JED-334-1, Size ISO 14405 LP					Copyright WABCO®			ProVia INDUCTIVE SENSOR WITH SOCKET STABSSENSOR MIT KUPPLUNGSDOSE CAPTEUR AVEC CONNECTEUR FEMELLE SENSORE INDUTTIVO CON CONNETTORE										
Further Technical Data: PRO 032 009 0					Date		Signature											
Doc. Code: 035					Sheet: 1 To 4		Drawn											
					2023-04-06		Vignesh											
					Checked													
General Tolerances JED-261					2024-01-30		Manivannan											
					Range of Nominal Dimensions (± mm)					Dimensions in mm								
Class 1)		≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400	±3°												
Fine		±0.5	±1	±1.5	±2			Mass		Scale		Material No.						
Medium		±1	±2	±3	±4			2 kg		1:1 (2:1)		PRO 032 009 0						
Coarse		±2	±3.5	±5	±6.5													
Tapped Holes acc.					Size		CAD System		ECN-No.		Revision		Techn. Resp.		Date of first issue: 2016-09-08			
1) Tolerance Class Applied Crossmarked					A 2		CREO				509391		1x A		6310_AM		Doc.Code 053 Language ML Sheet 1/1	
															Replacement for -			