

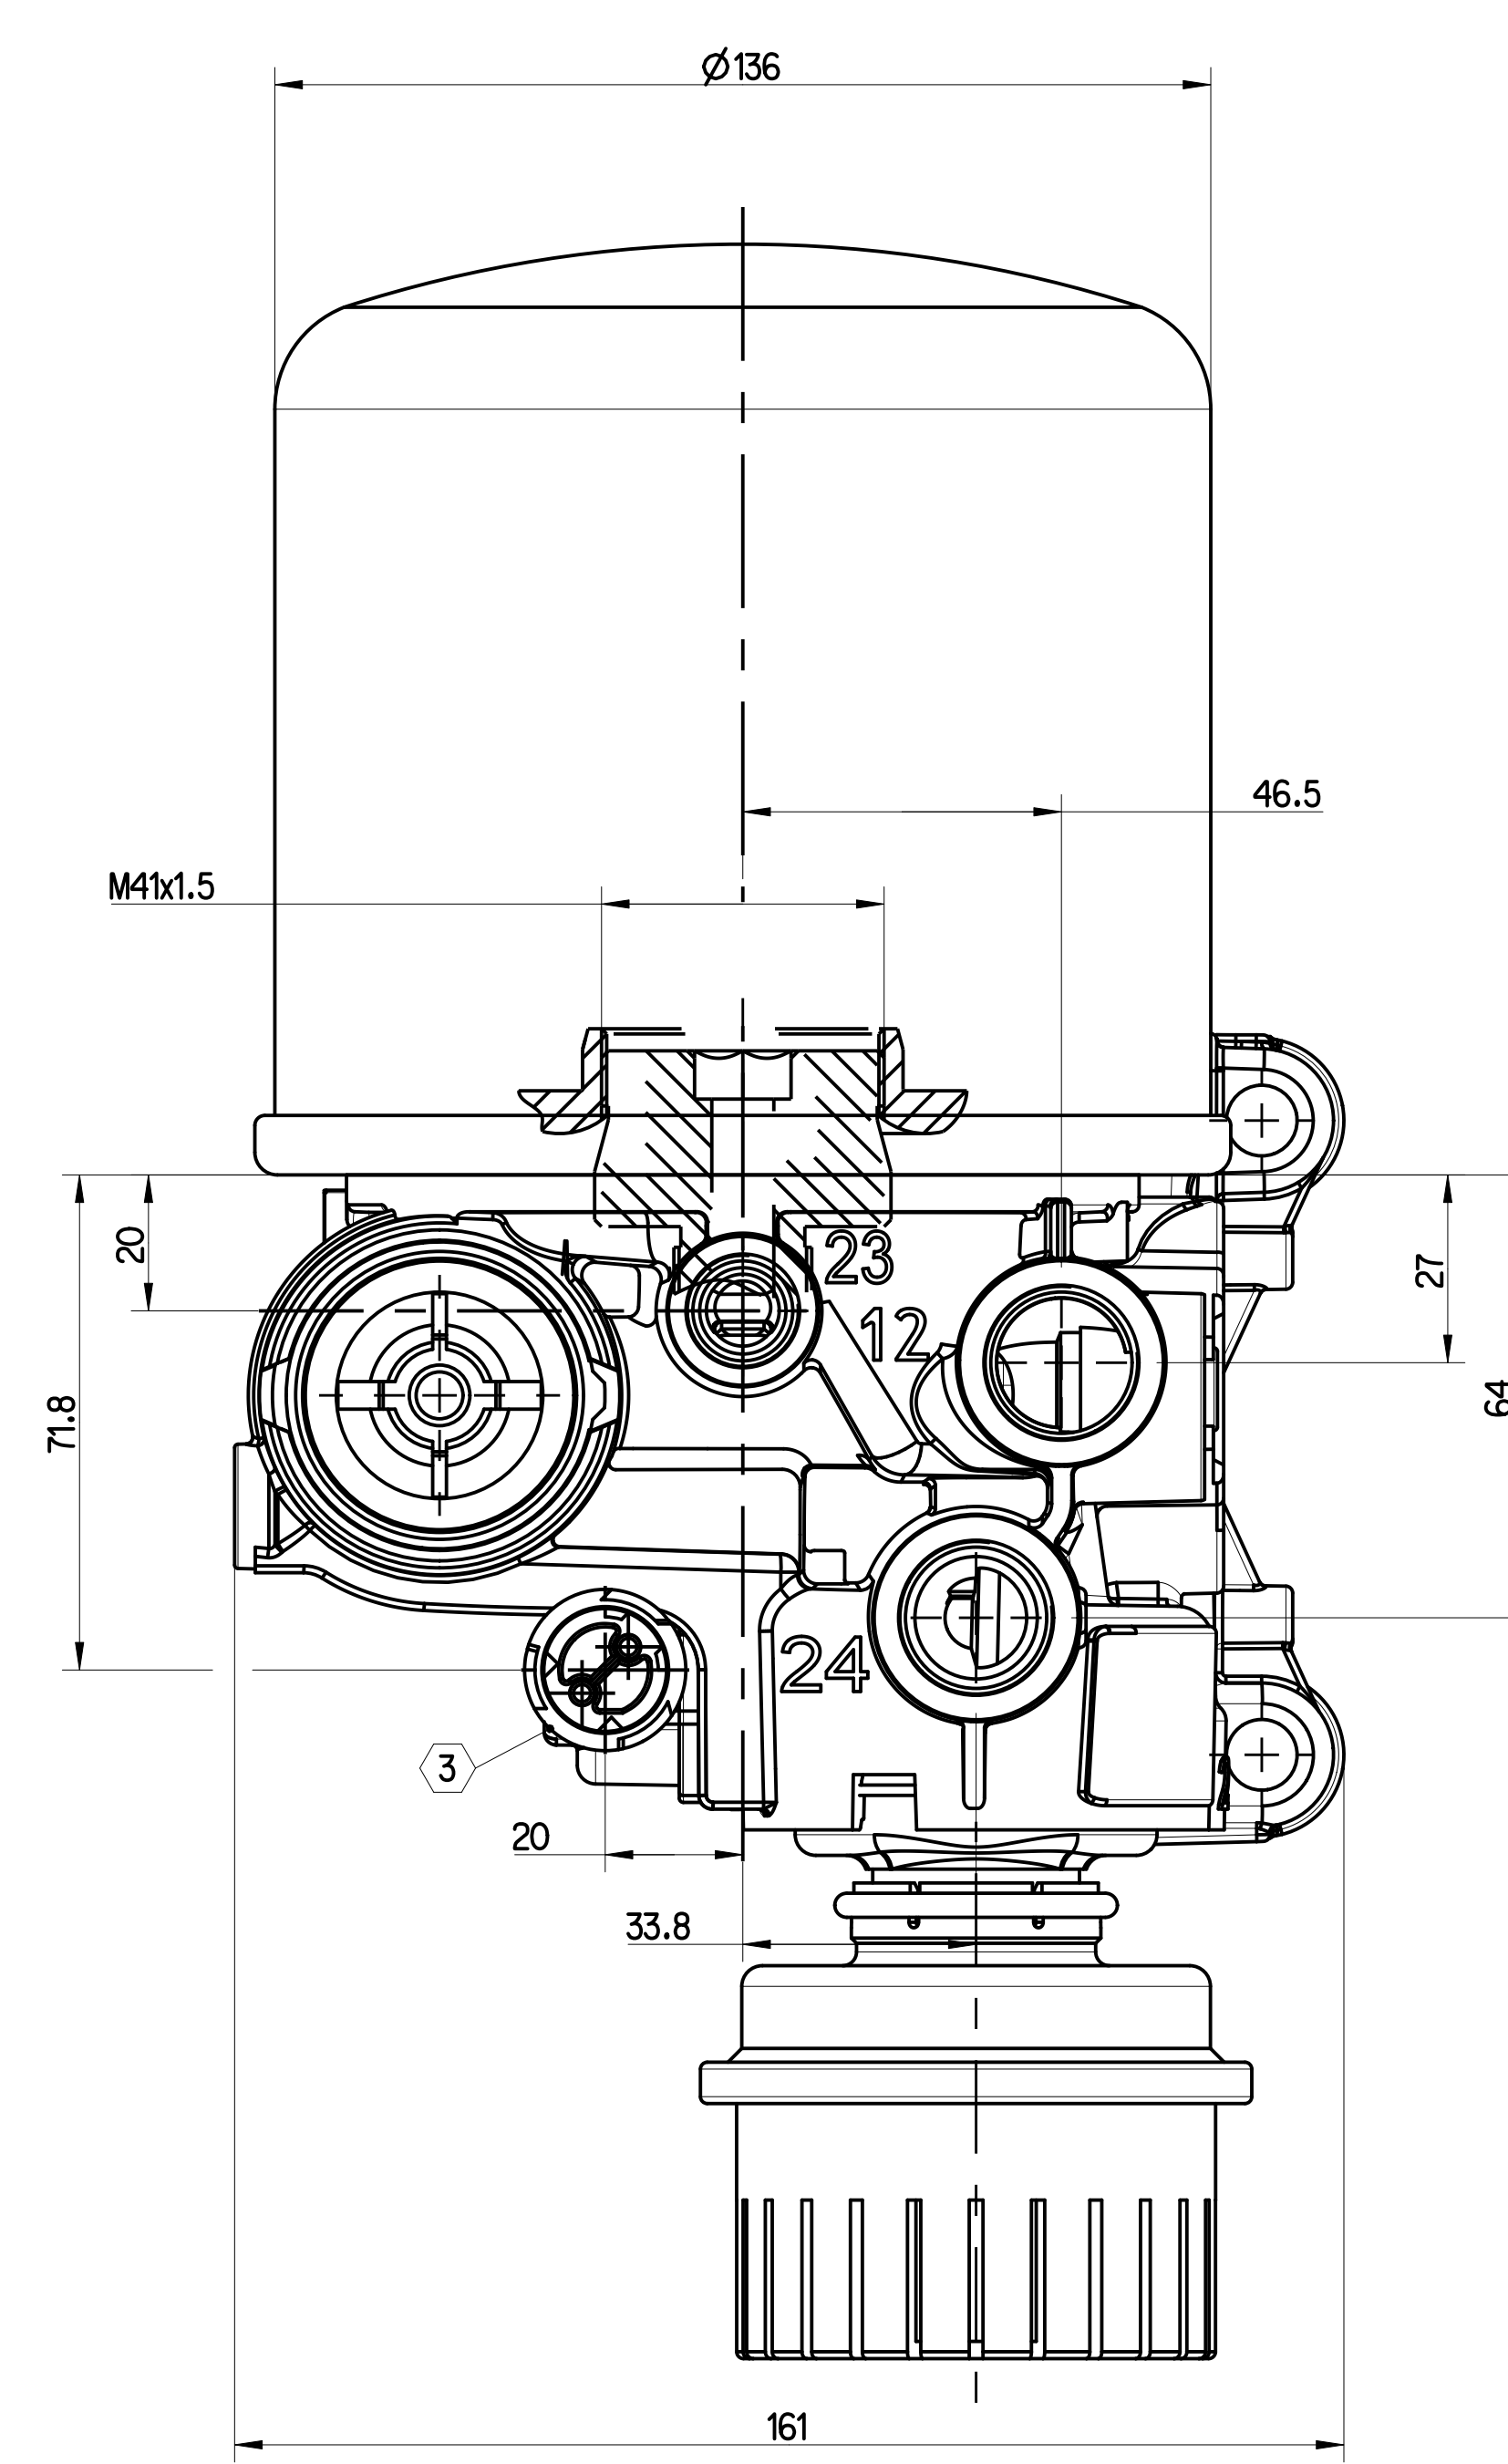
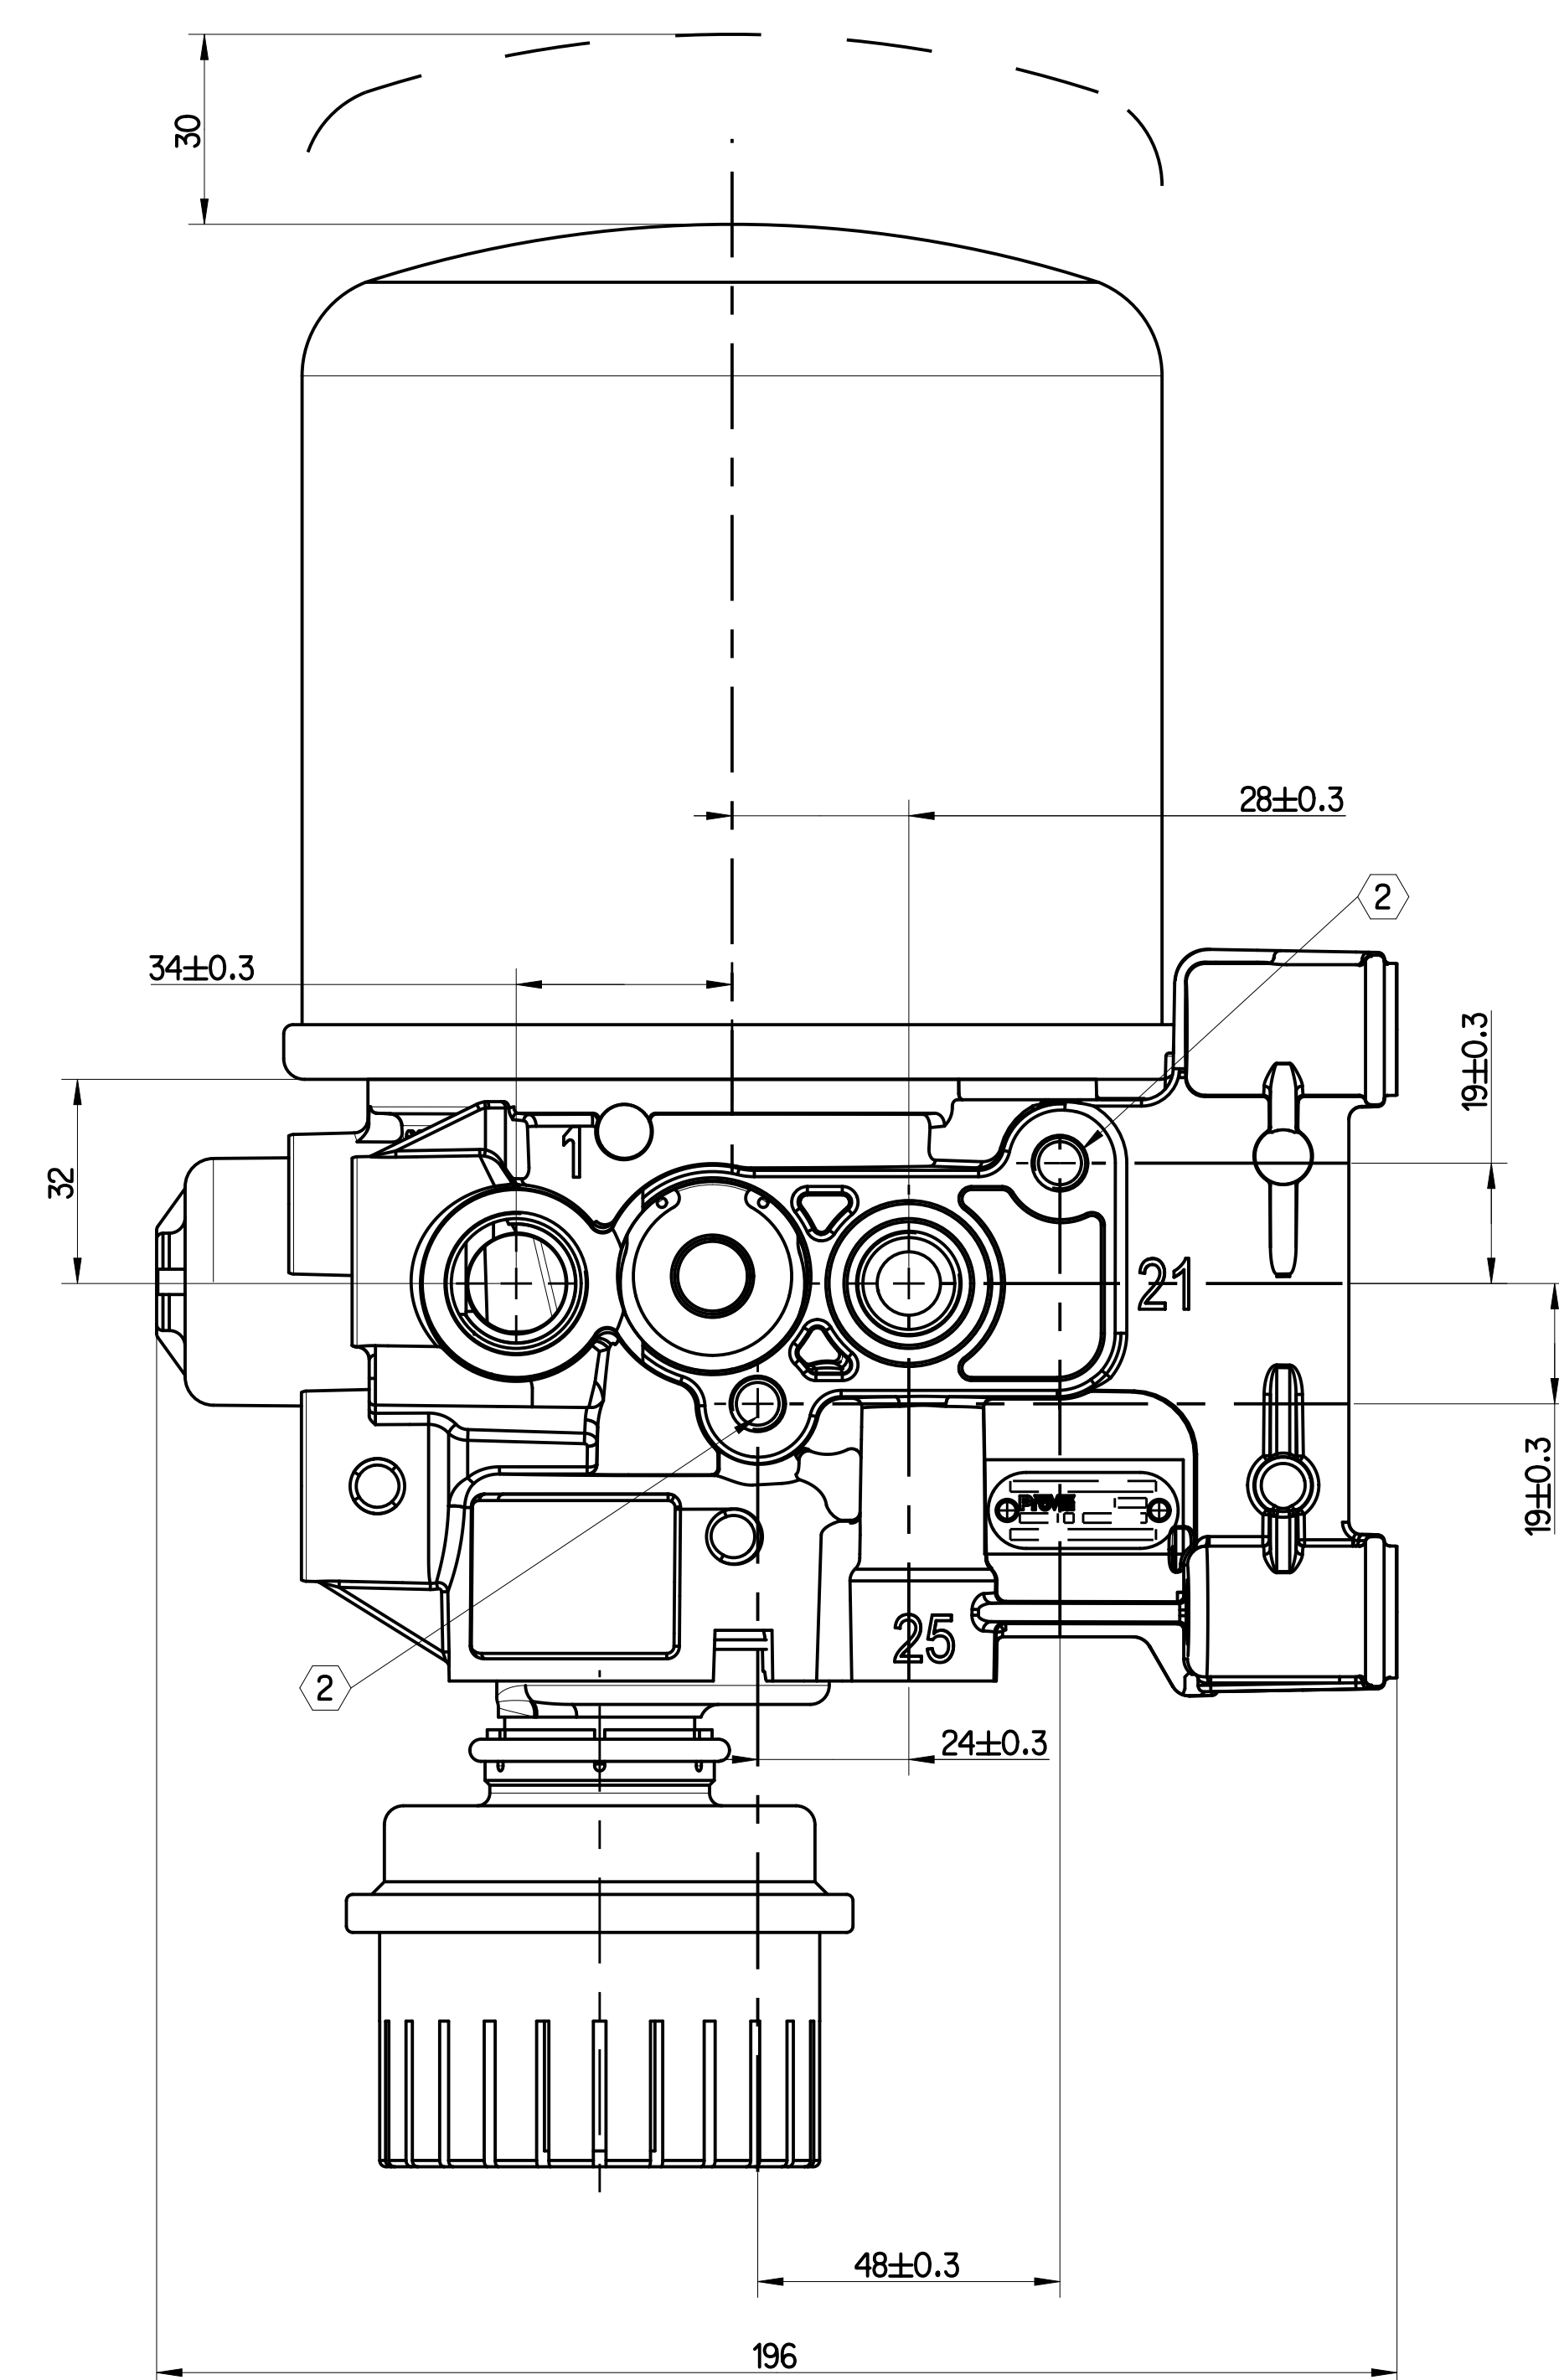



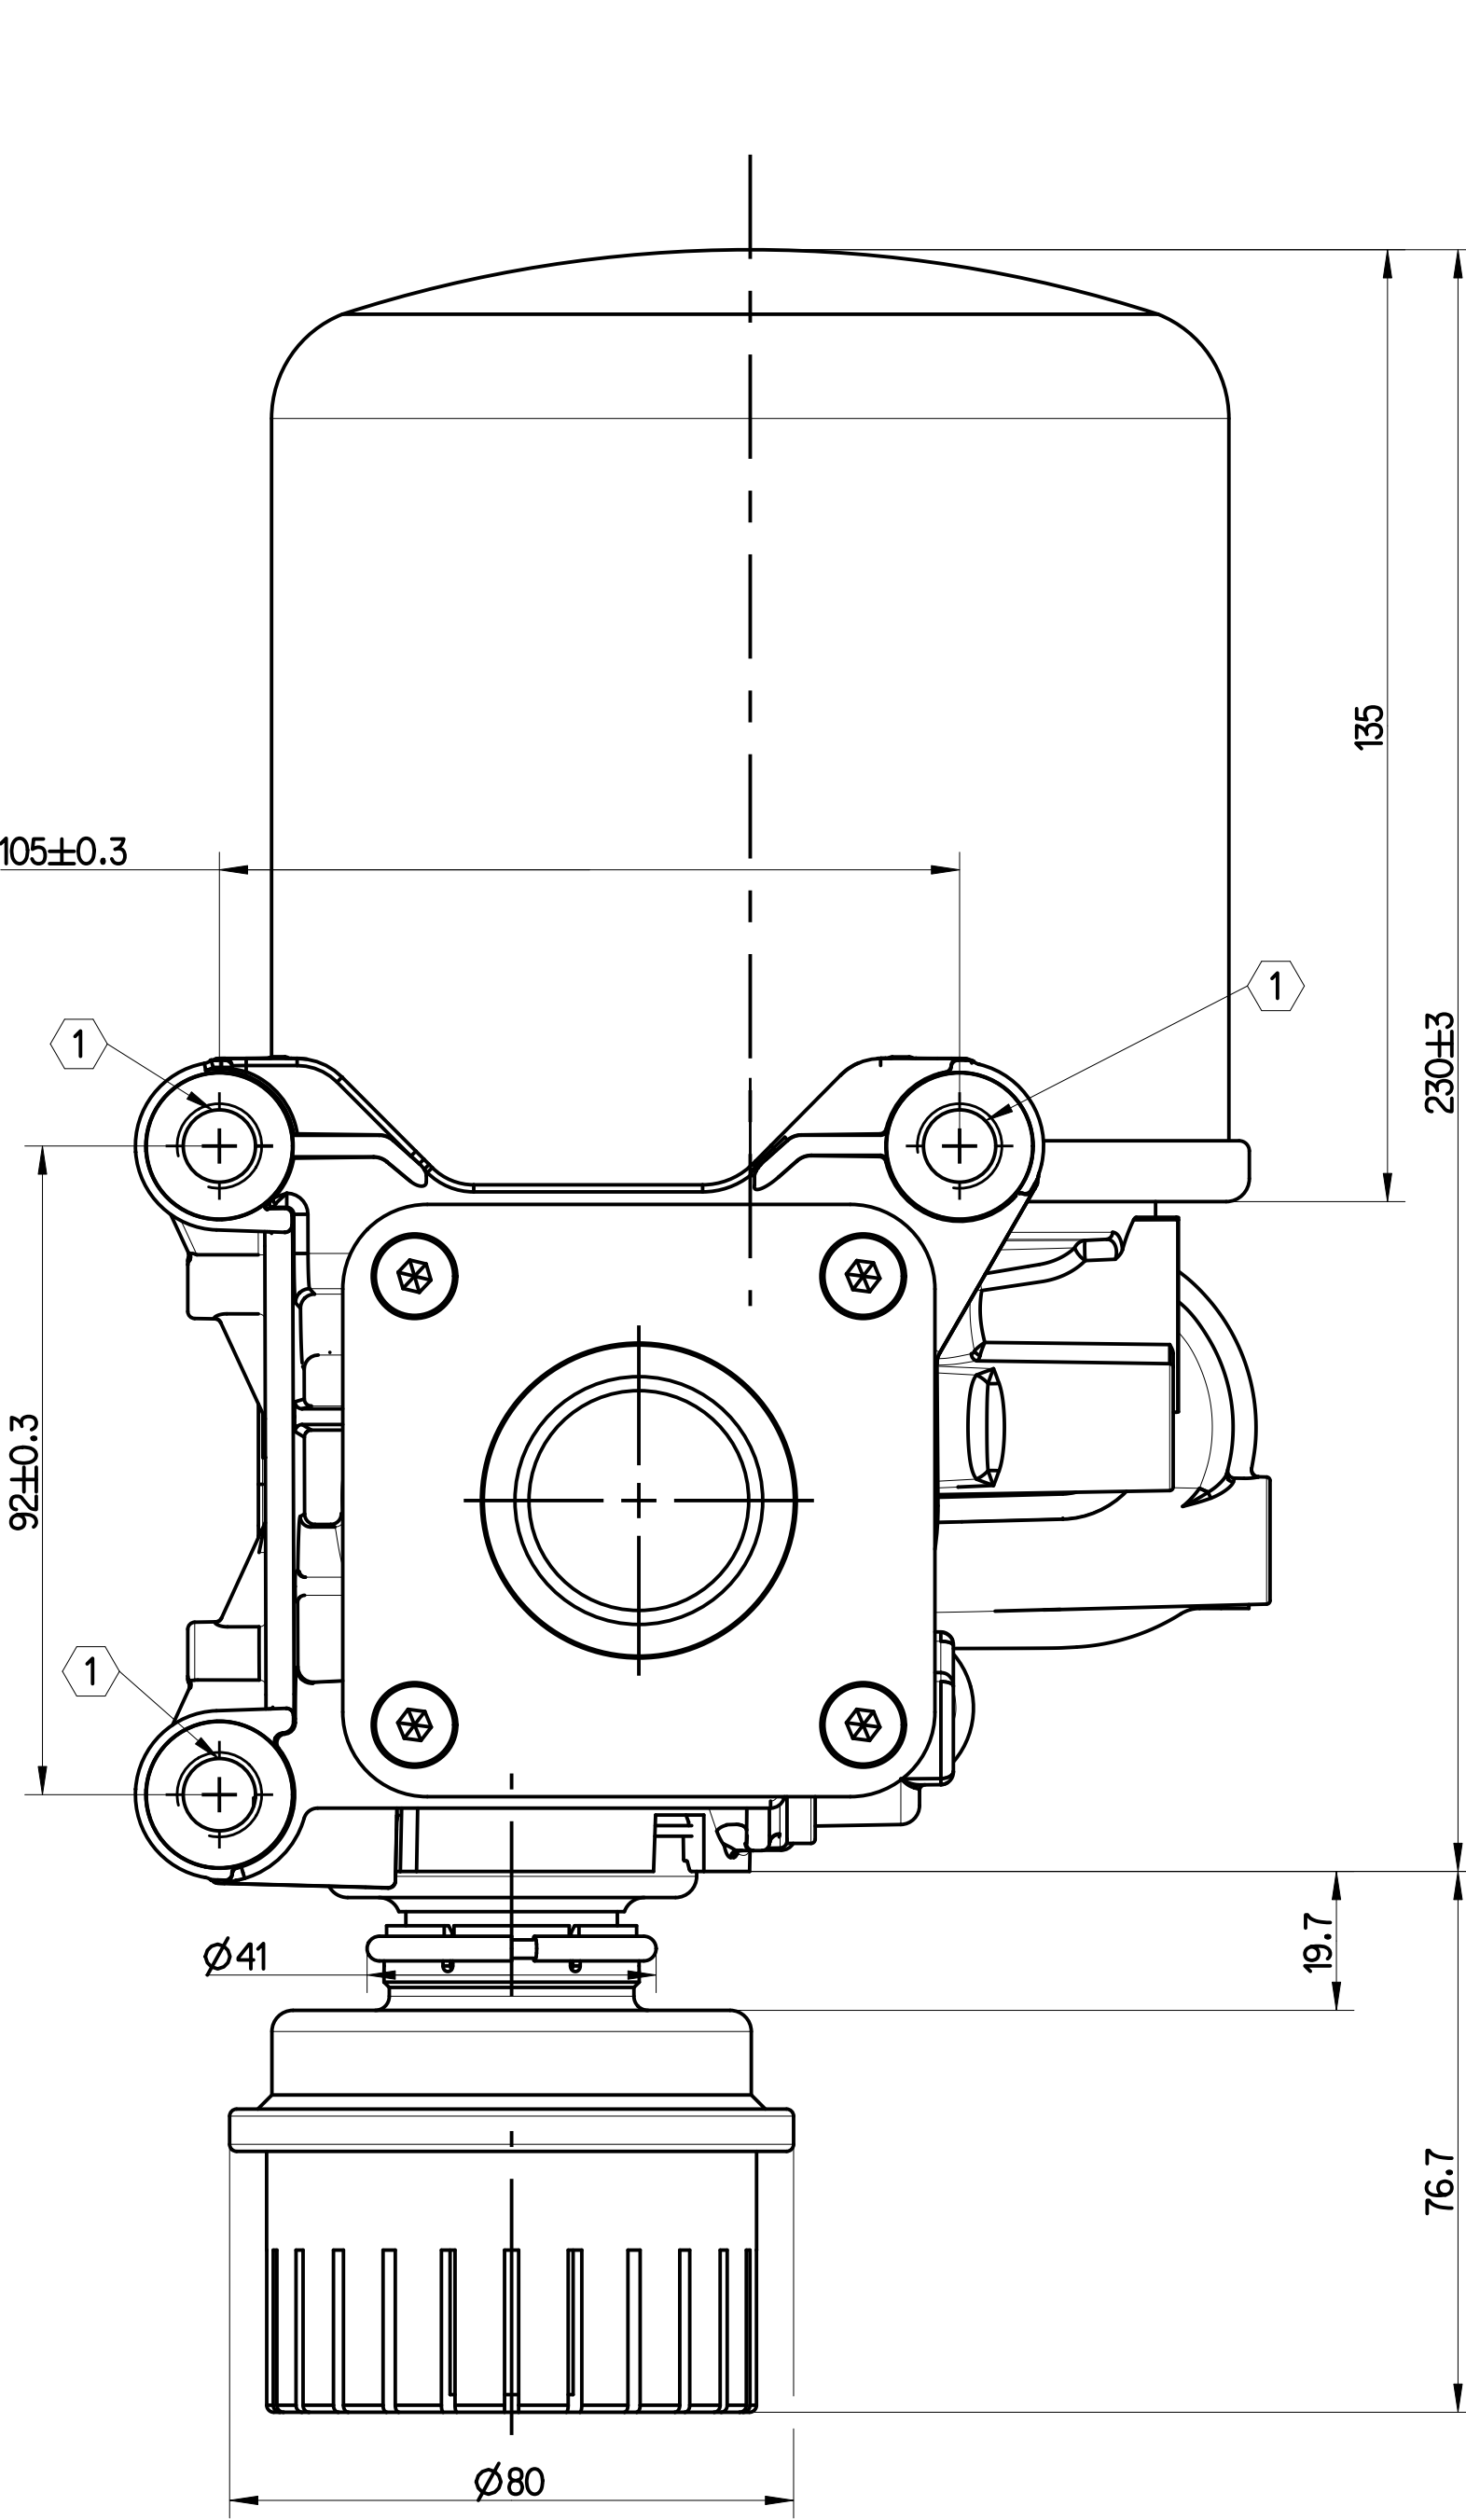


1. MEDIUM : COMPRESSED AIR
2. WORKING PRESSURE : MAX 13 BAR
3. OPERATING TEMPERATURE RANGE : -40°C.....TO +80°C
4. CUT OUT PRESSURE : 10.4±0.2 BAR
5. HEATING VOLTAGE : 24 V
CUT-IN TEMPERATURE : 7±6°C ; CUT-OFF TEMPERATURE : 29.5 ± 3°C
6. OPERATING RANGE TO CUT-IN : 1 BAR 1.5 BAR

PORT	THREAD	TORQUE (Nm)
1	M22x1.5	53
12	M22x1.5	53
21	M16x1.5	34
23	M16x1.5	34
24	M22x1.5	53
①	M12	21
②	M8	8
③	ISO 15170 A1- 2.1.1.1.Ag/K3	

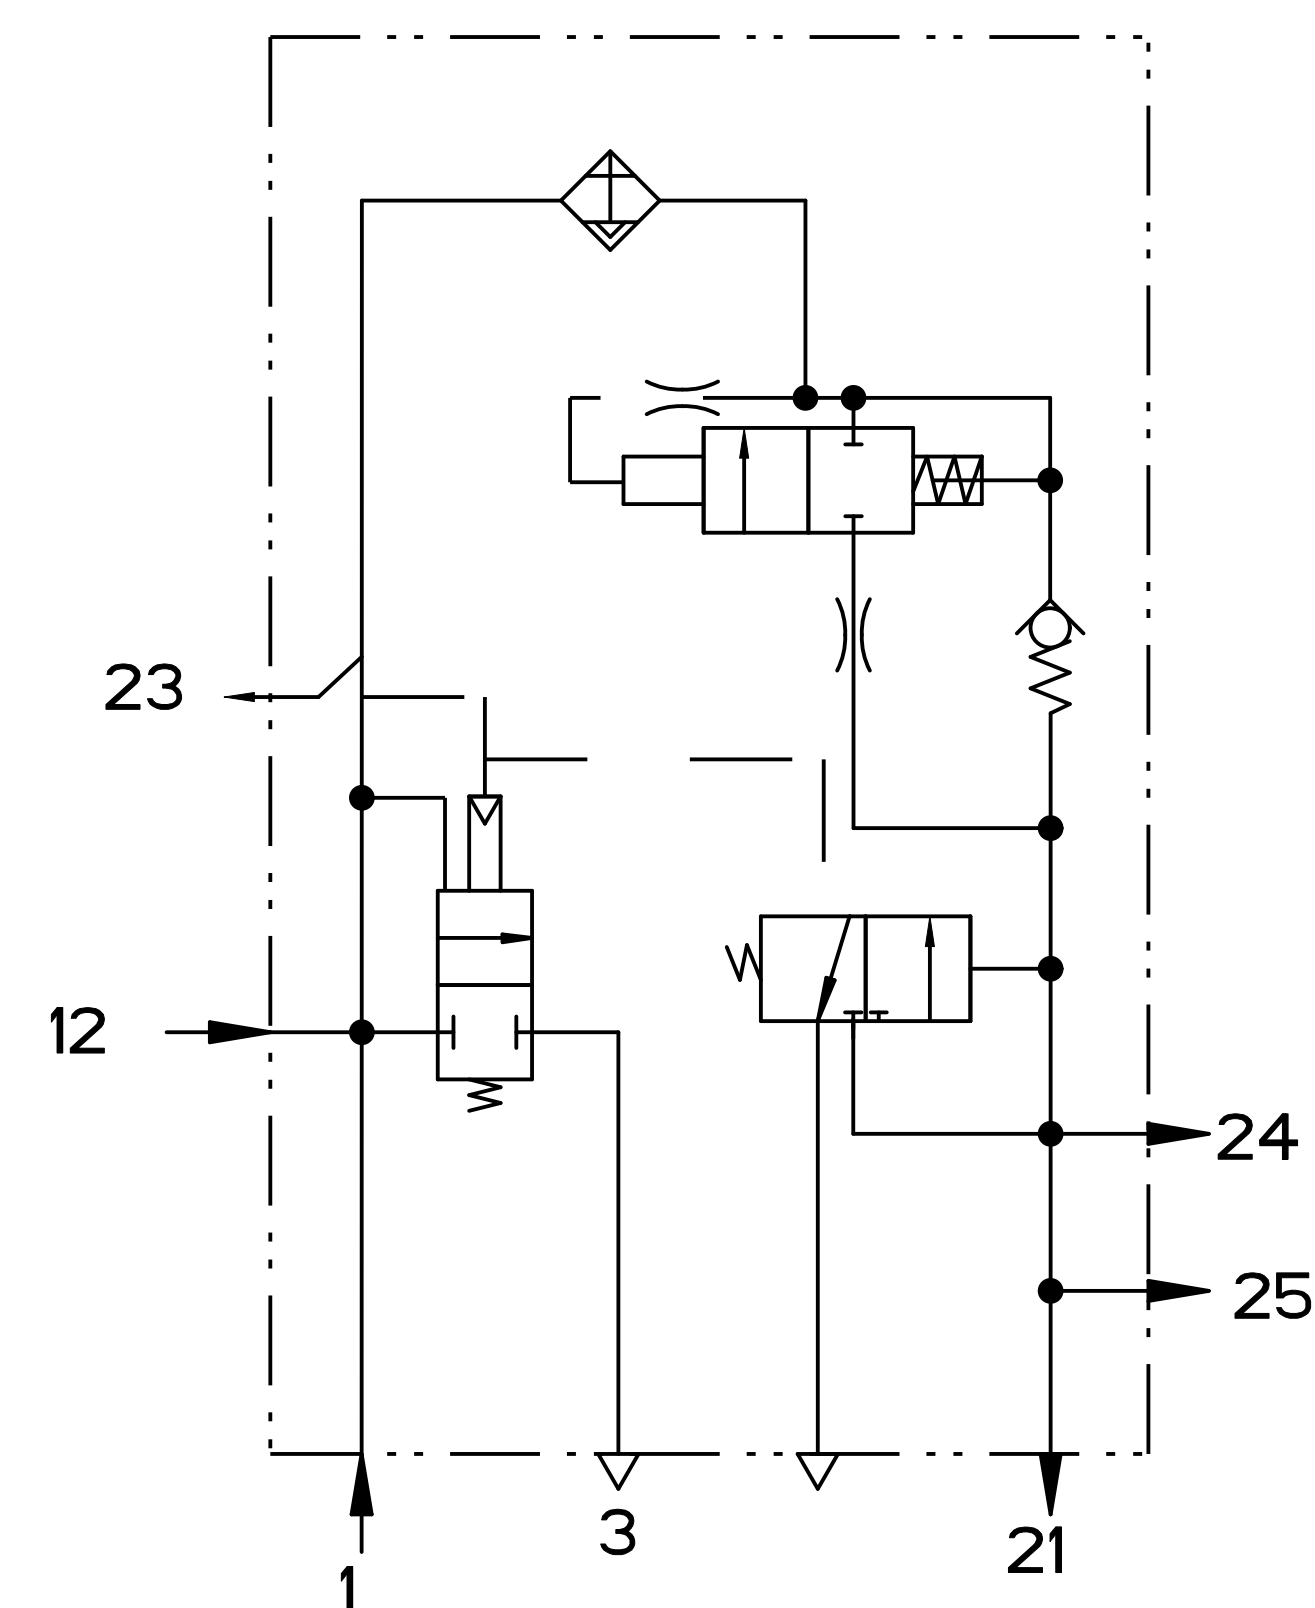

SCHEMATIC DIAGRAM

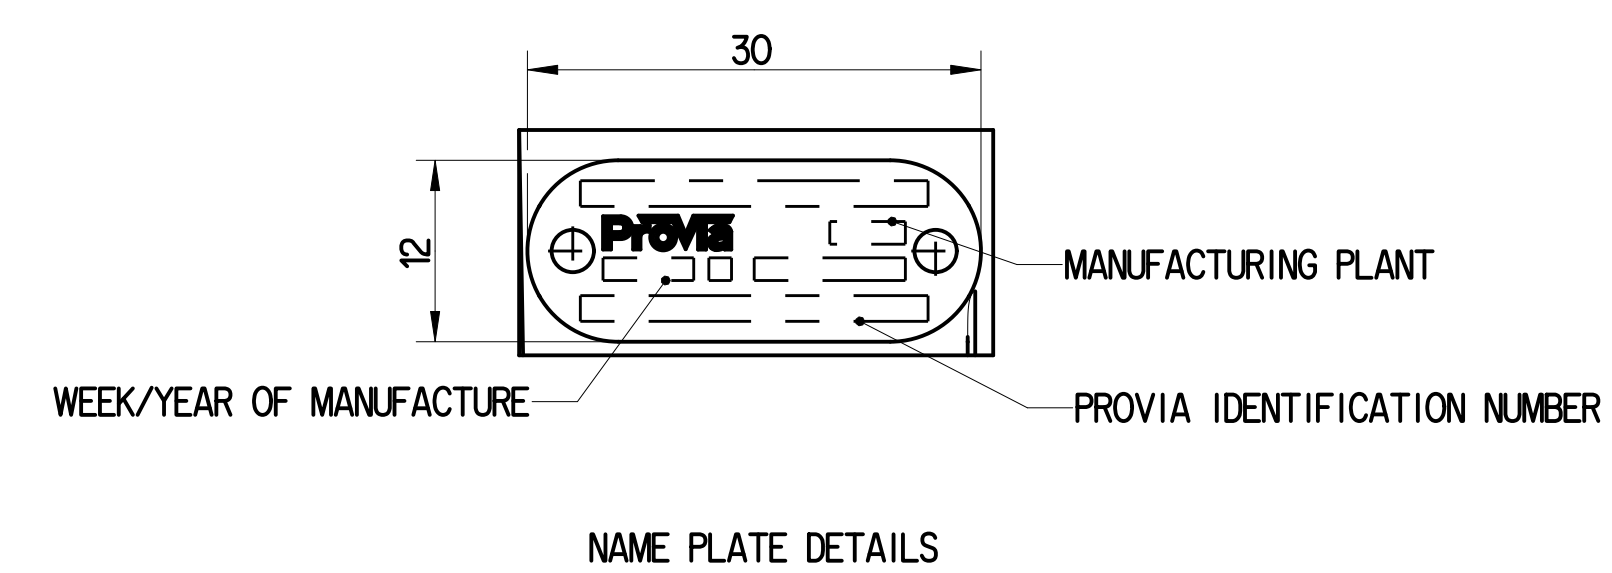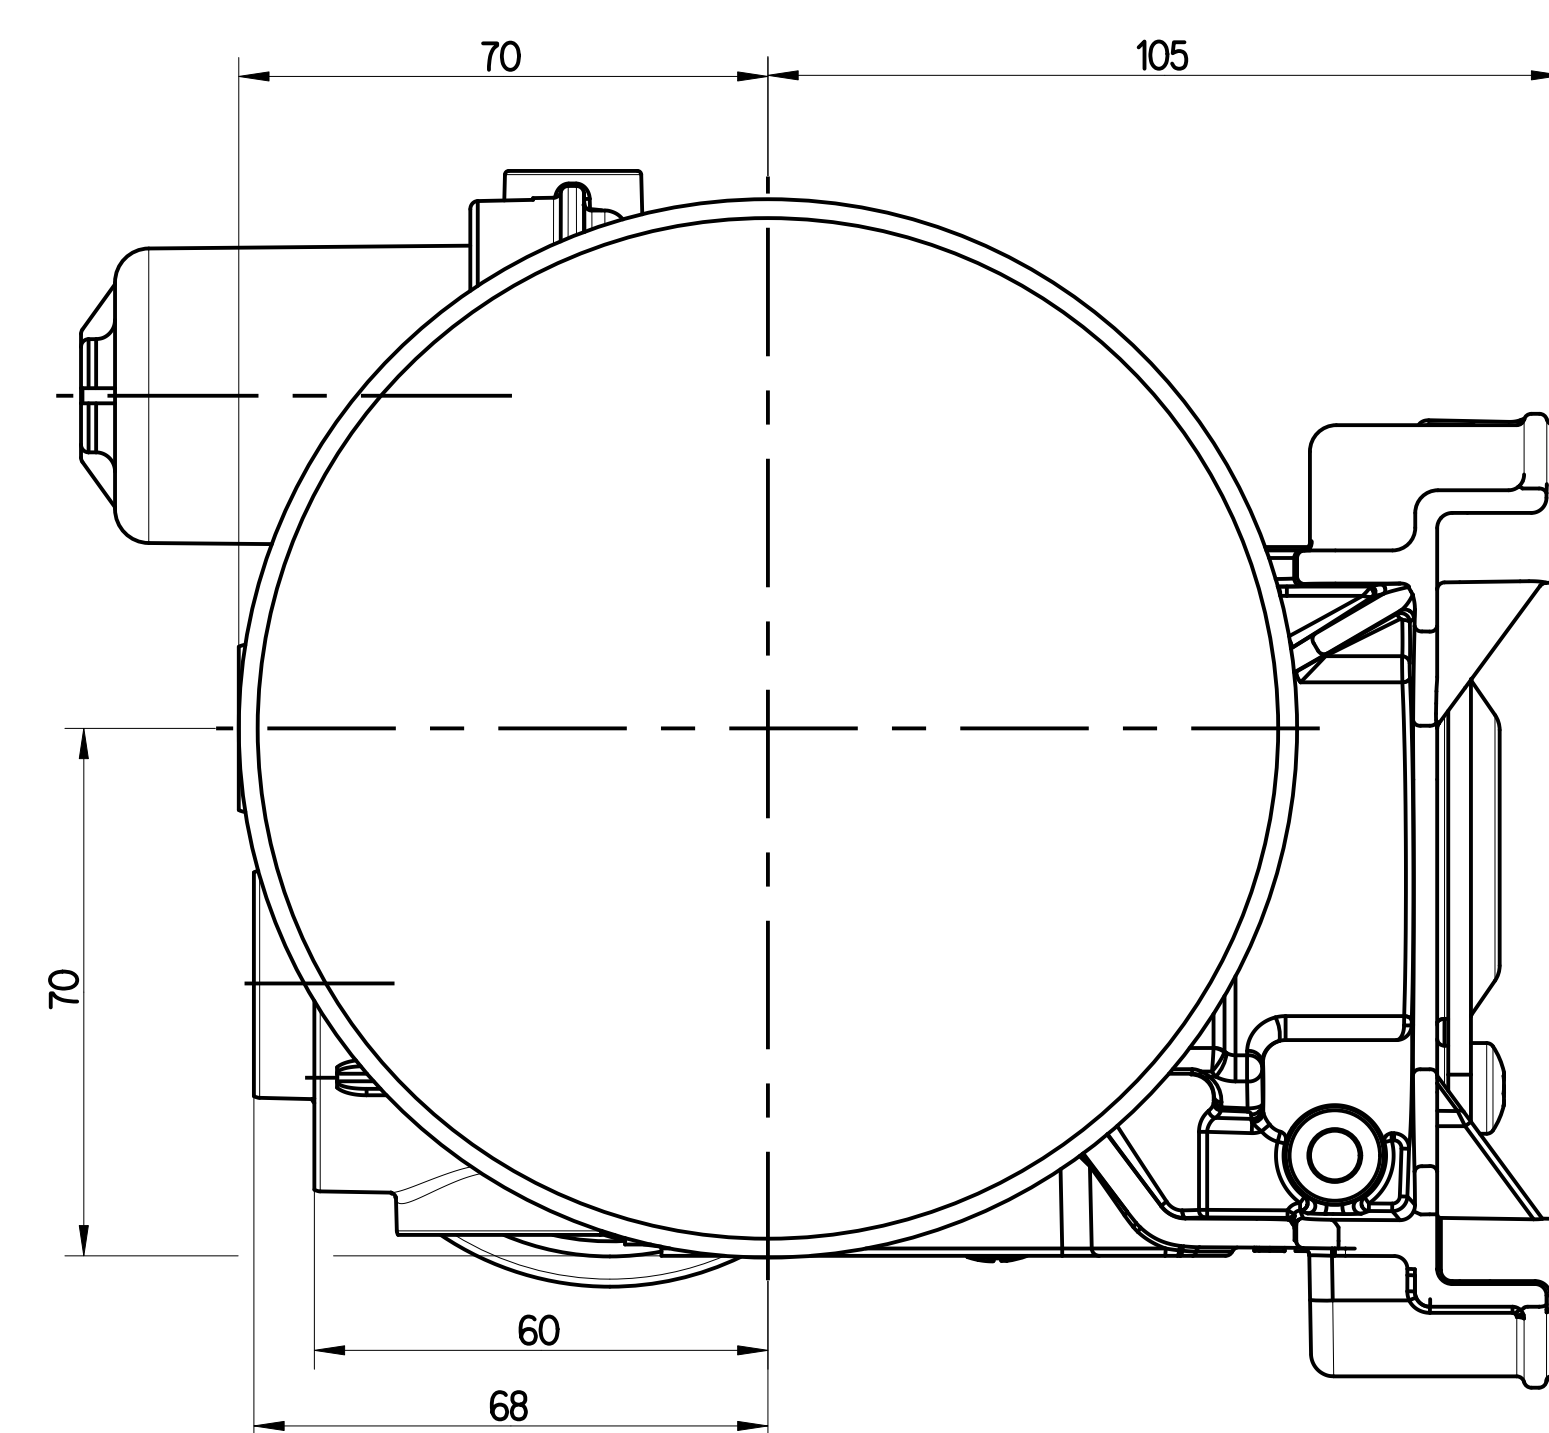

General Specification: ISO 9001, ISO-9001-1, ISO 14001 LP Further Technical Data: Product Specification Doc. Code: 035				Copyright: © Date: _____ Signature: _____ 2025-03-14 <i>Kayko</i> Checked: _____ 2025-03-17 <i>Pawlowski</i>		 PROvia AIR DRYER	
General Tolerances: JED-261 Range of Approval Dimensions (± mm)				Dimensions in mm		Material No.: _____ Date of test series: _____	
Class	1	2	3	4	5	6	7
Fine	±0.5	±1.0	±1.5	±2.0	±2.5	±3.0	±3.5
Medium	±0.5	±1.0	±1.5	±2.0	±2.5	±3.0	±3.5
Coarse	±0.5	±1.0	±1.5	±2.0	±2.5	±3.0	±3.5
1) Tolerance class	1) Tolerance class: Apply cross-hatched						
1) Tolerance class: Apply cross-hatched				1) Tolerance class: Apply cross-hatched		1) Tolerance class: Apply cross-hatched	