

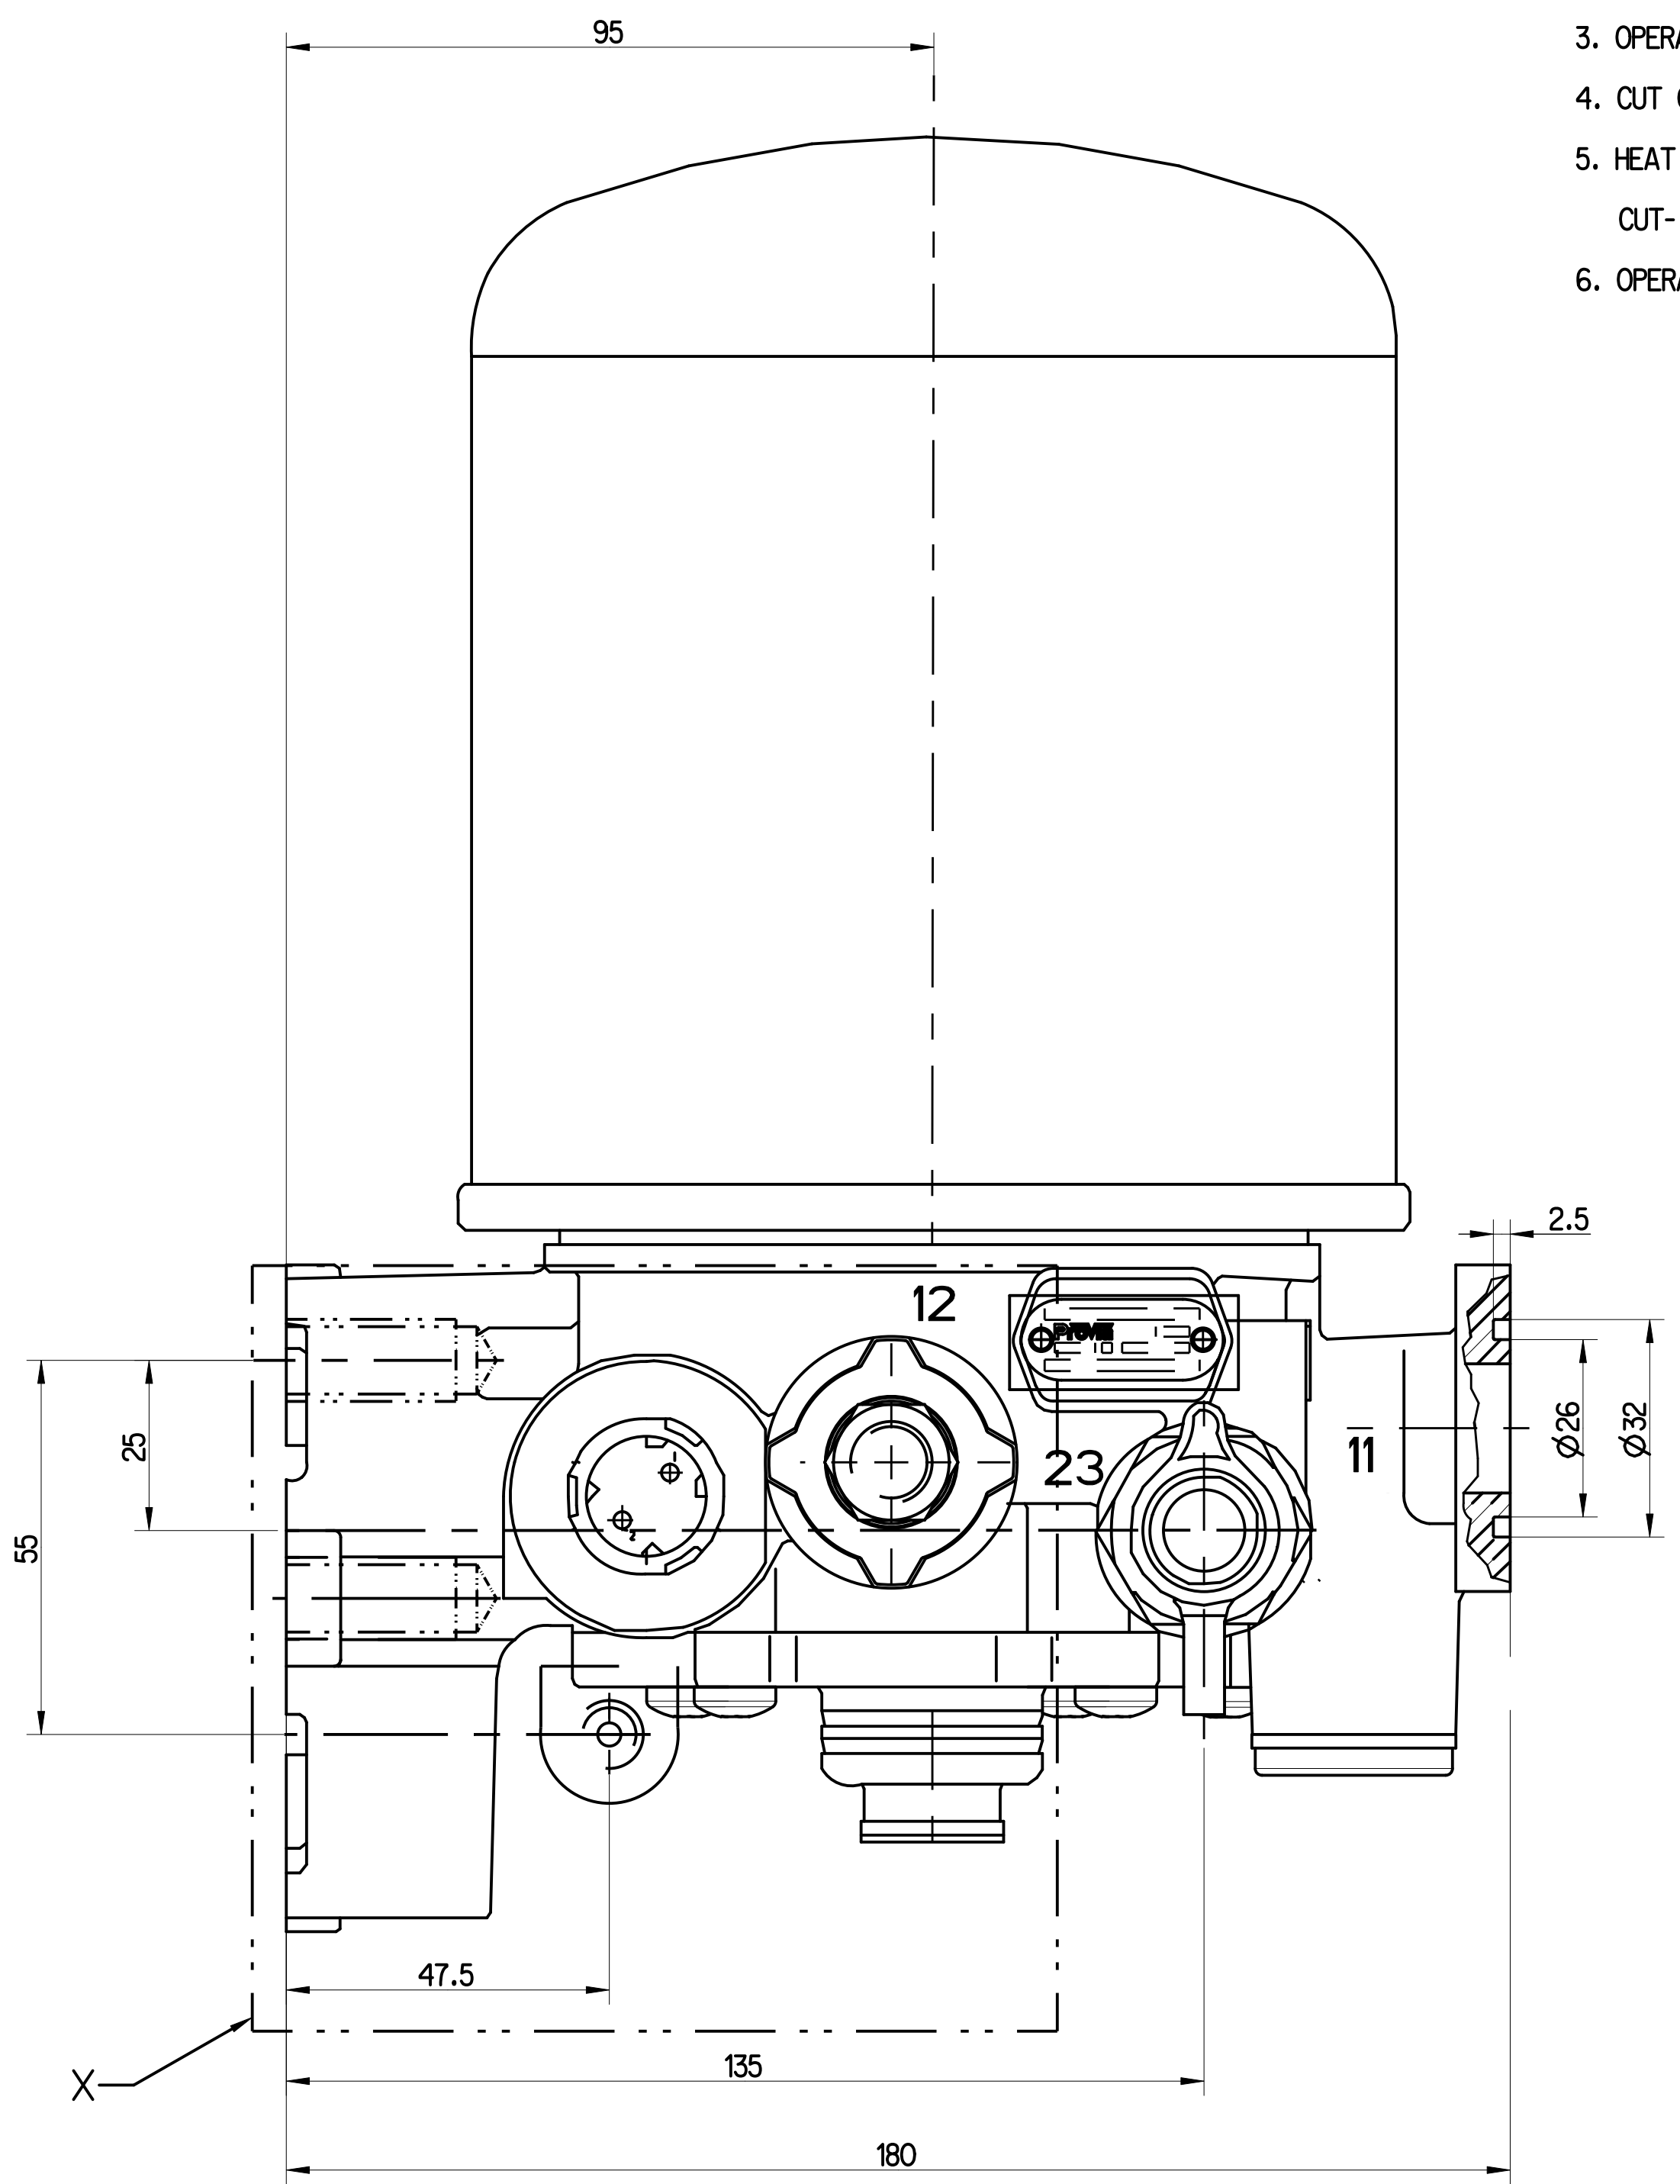
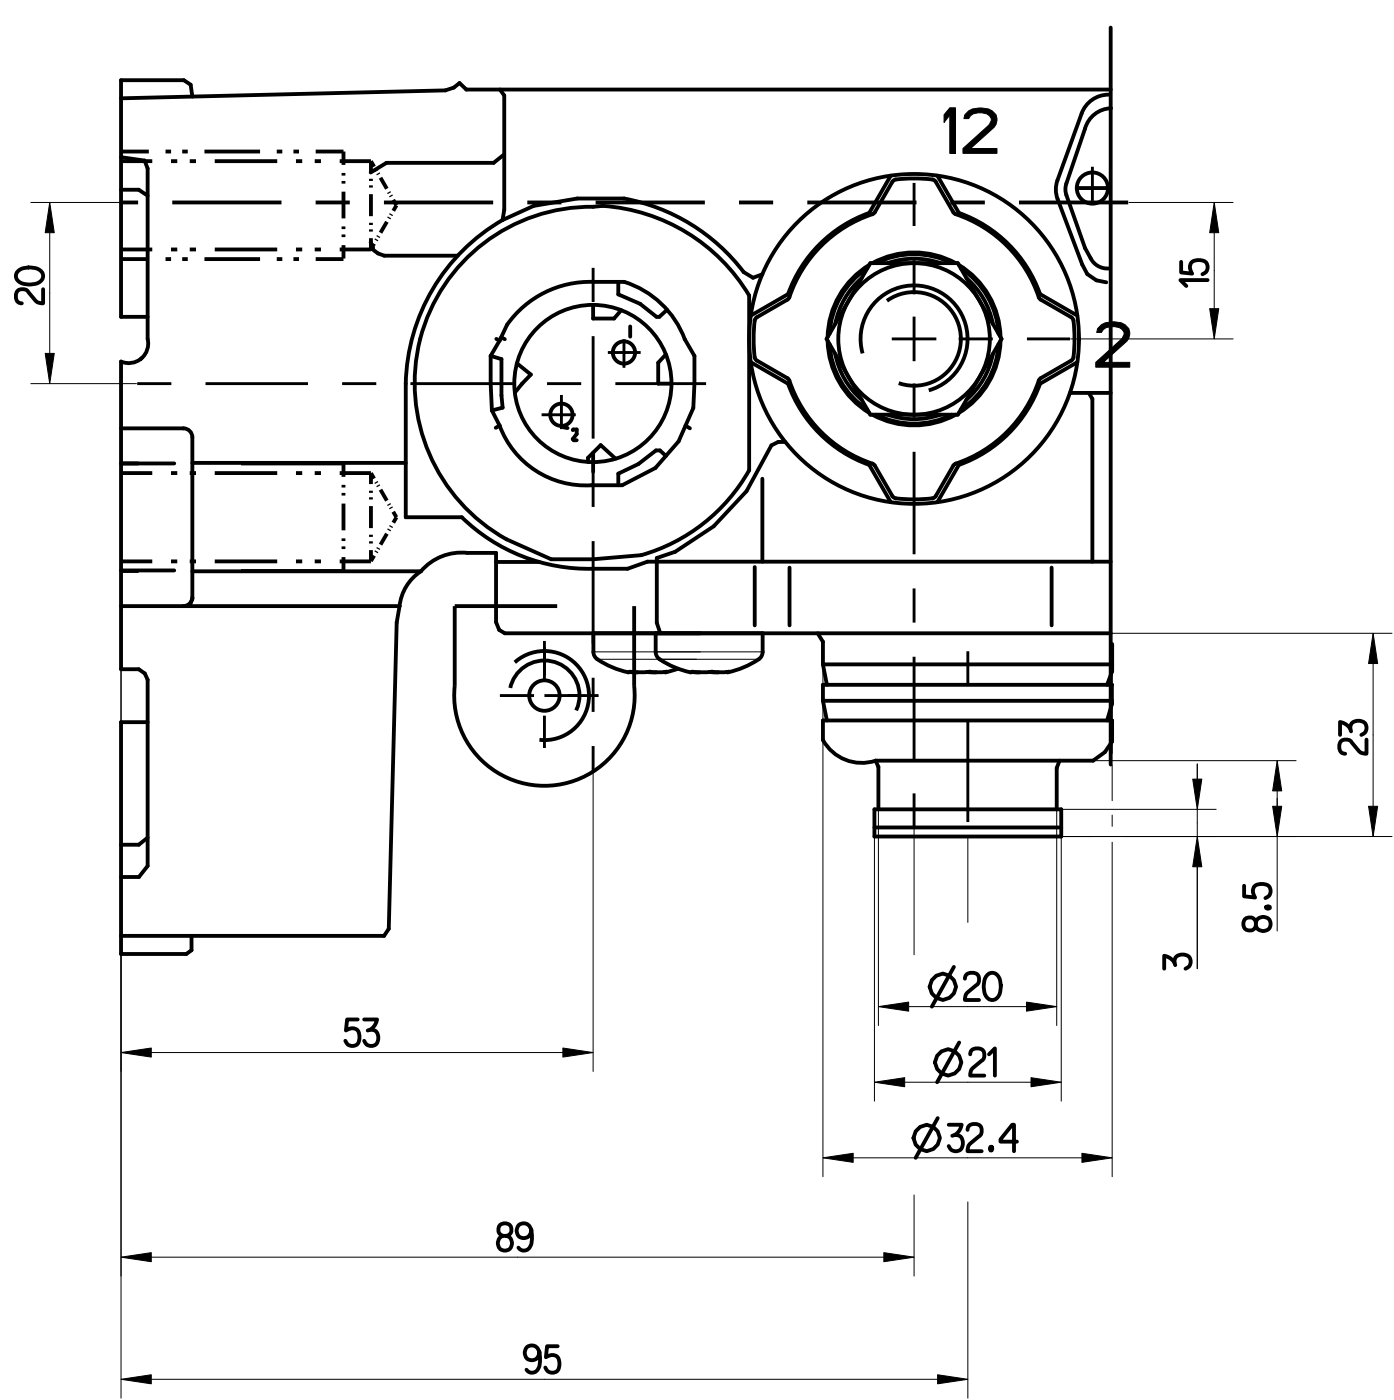
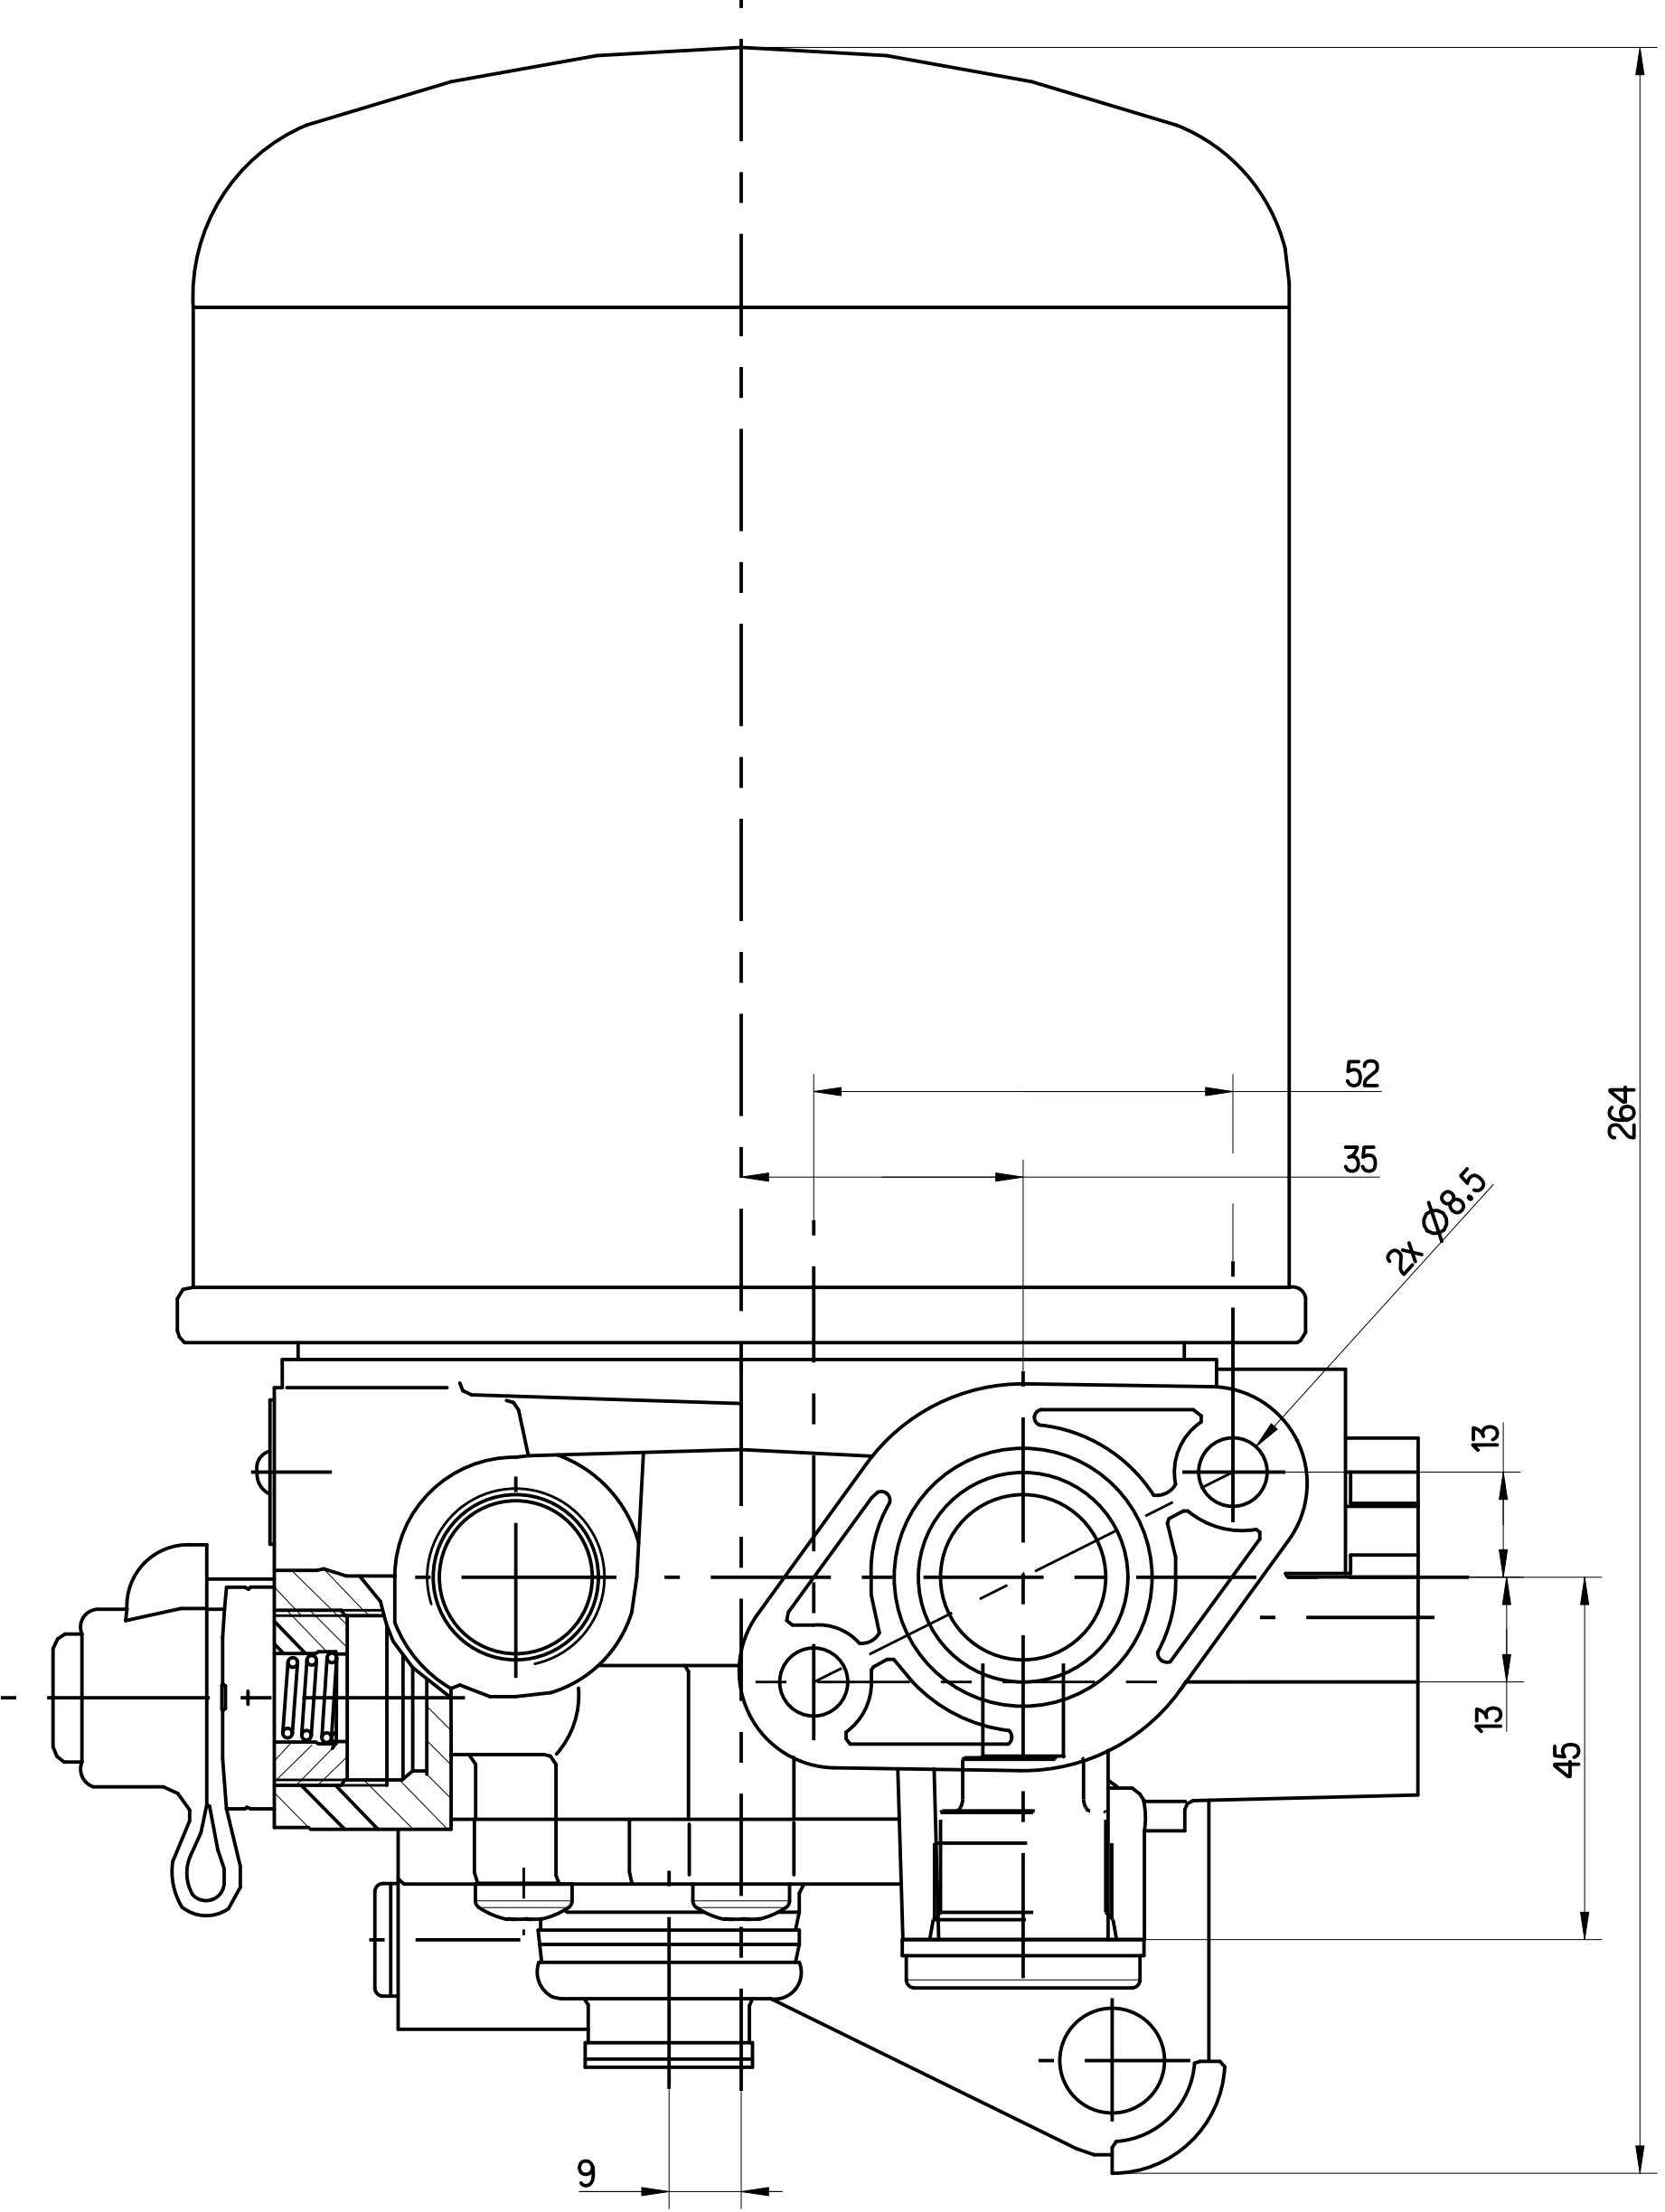
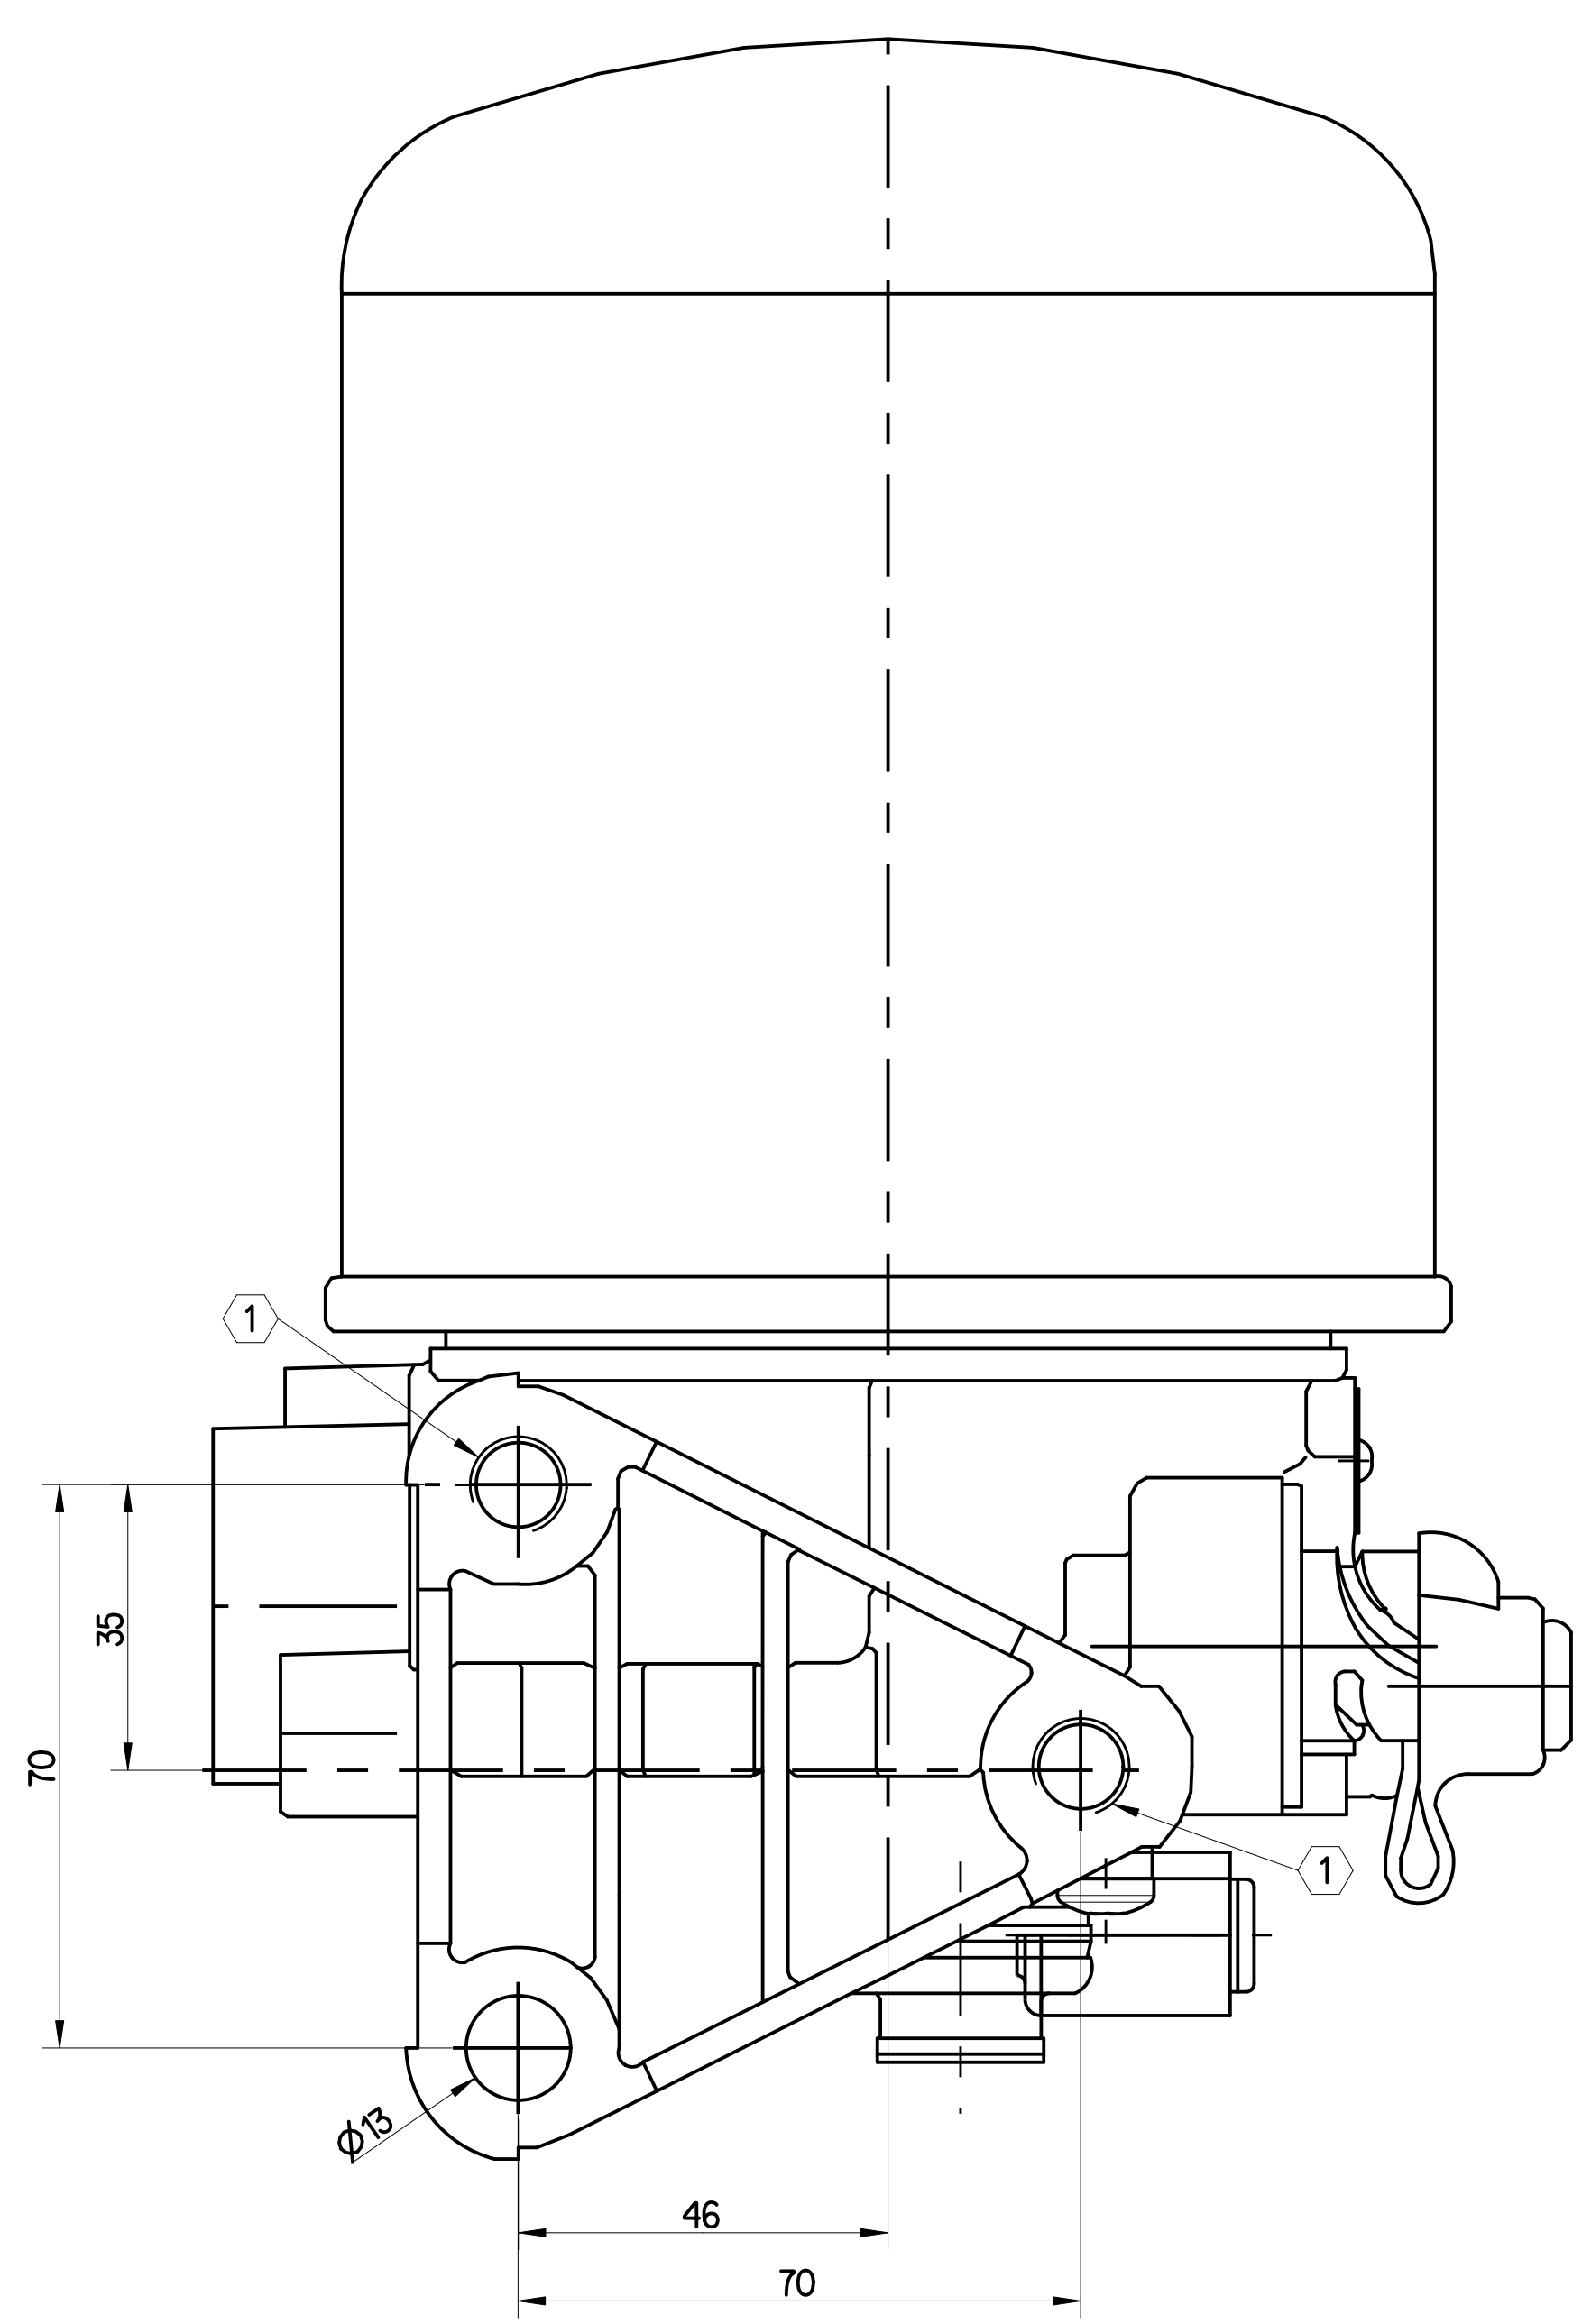
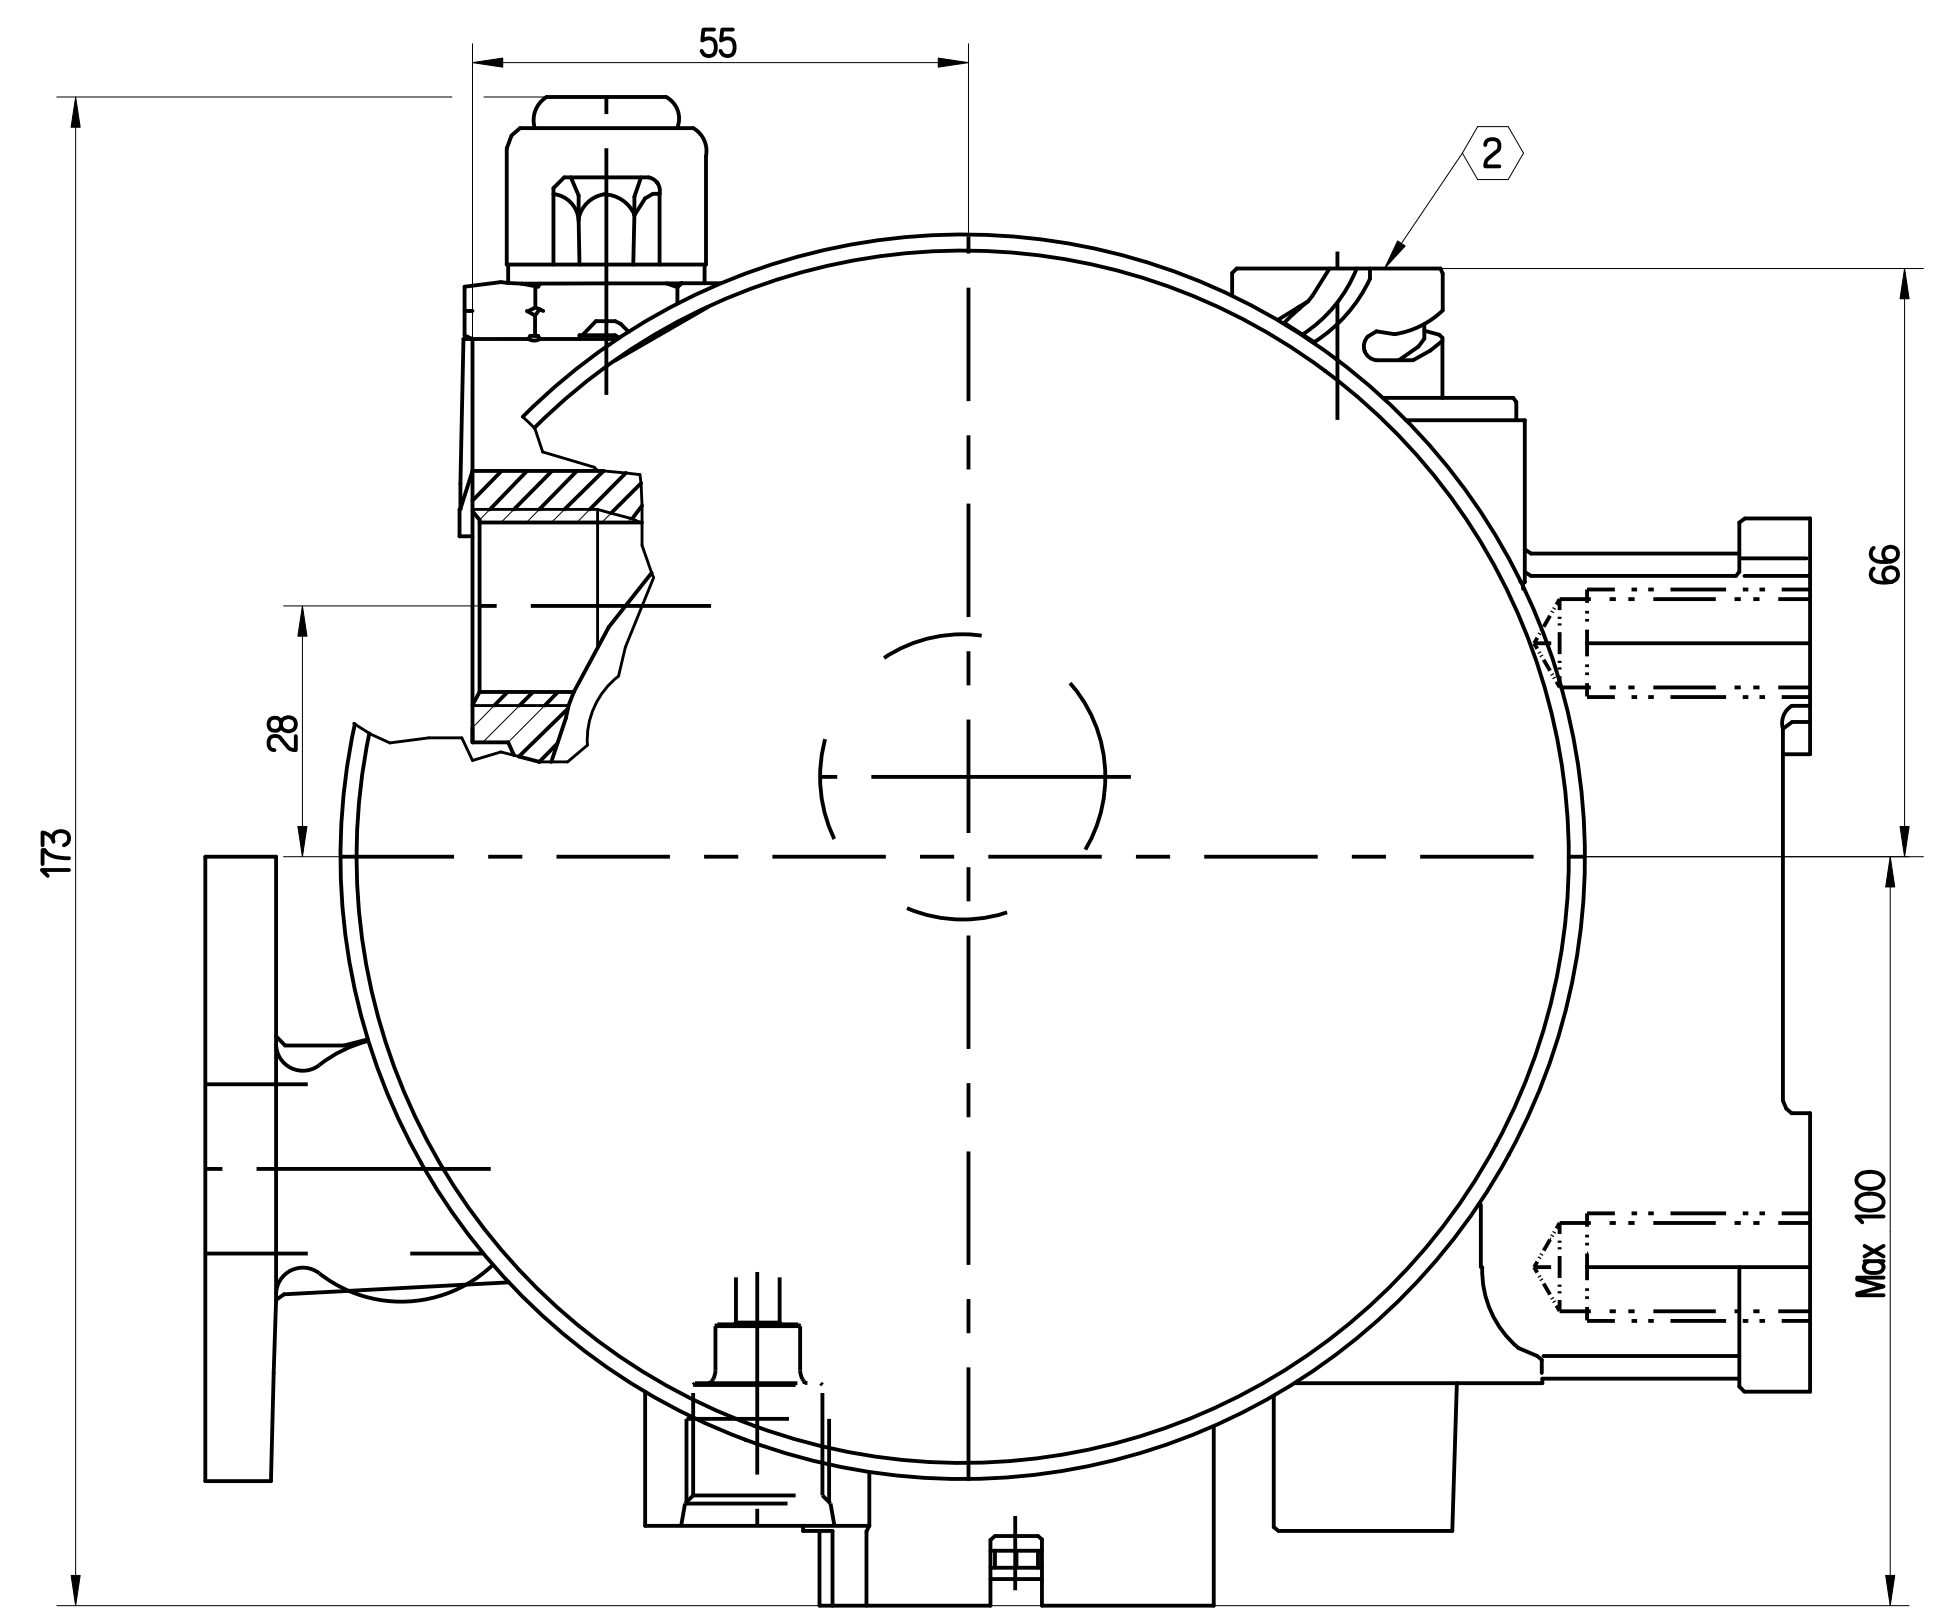
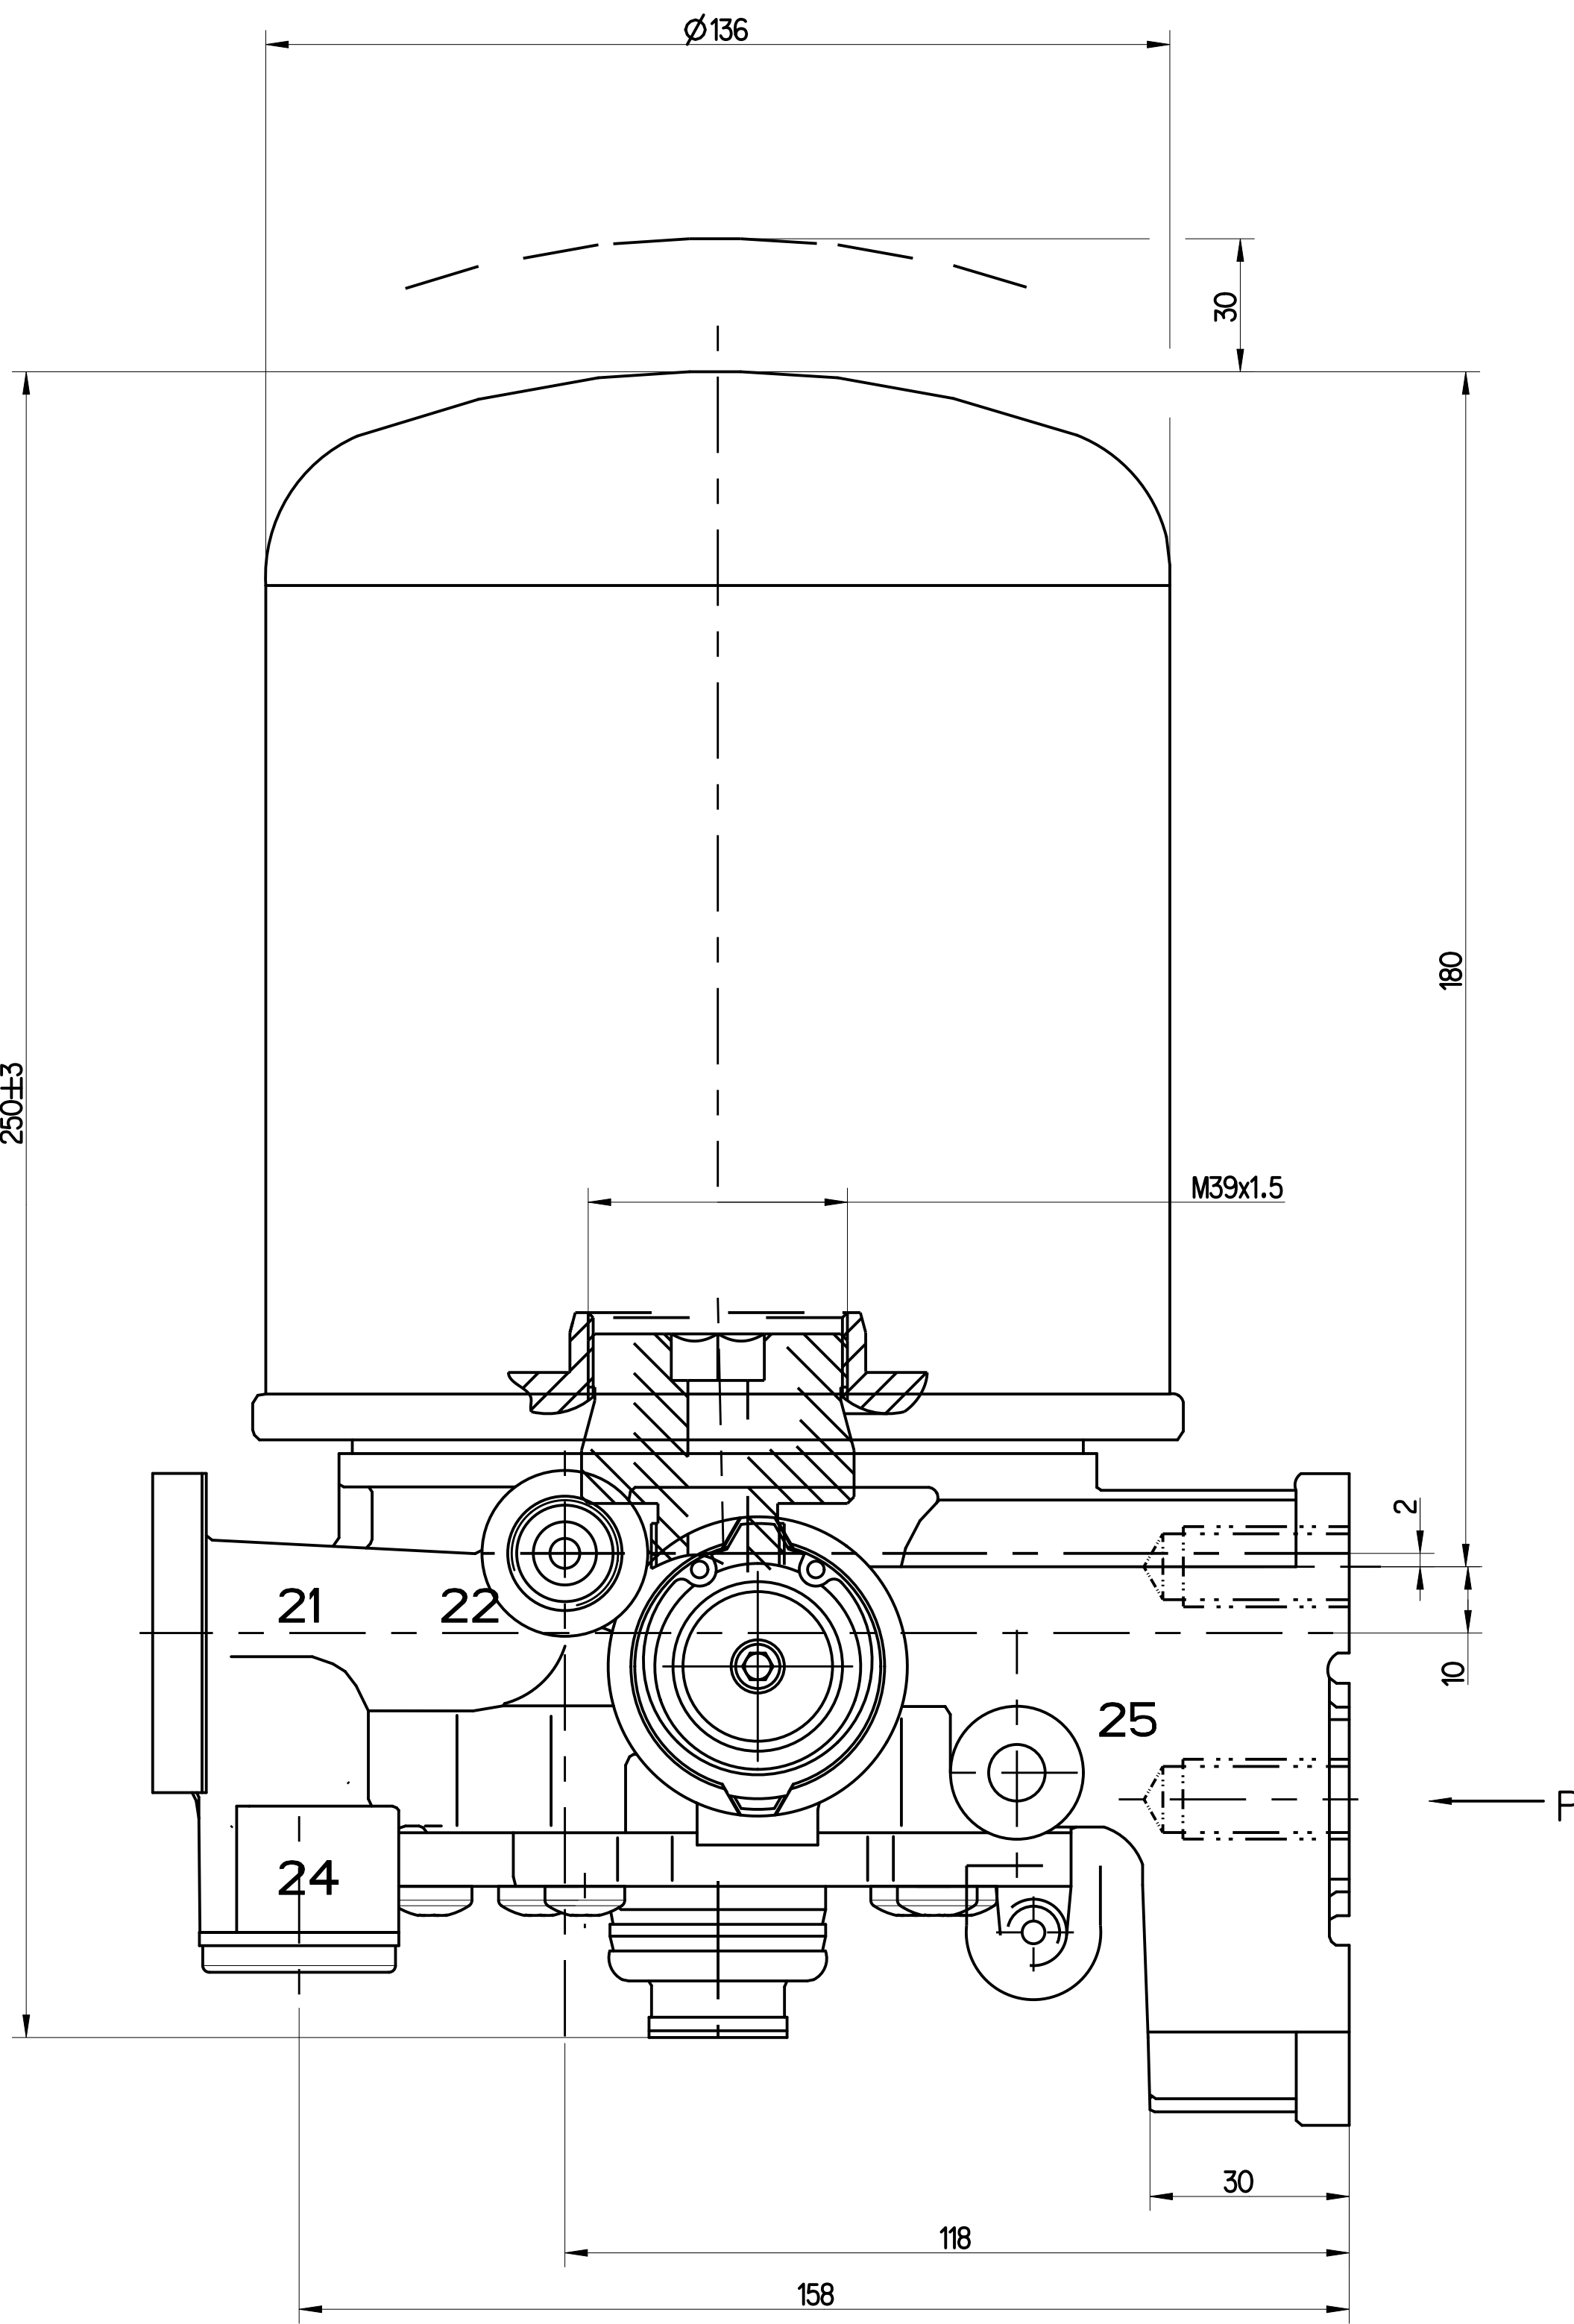


Copyright © 2025 Provia S.p.A. All rights reserved. This document is the property of Provia S.p.A. and its content is confidential. Any unauthorized use, reproduction, or distribution is strictly prohibited. Provia S.p.A. is not responsible for any damages or losses arising from the use of this document. The information contained herein is for reference only and does not constitute a contract. The information contained herein is subject to change without notice. Provia S.p.A. is not responsible for any damages or losses arising from the use of this document. The information contained herein is for reference only and does not constitute a contract. The information contained herein is subject to change without notice.

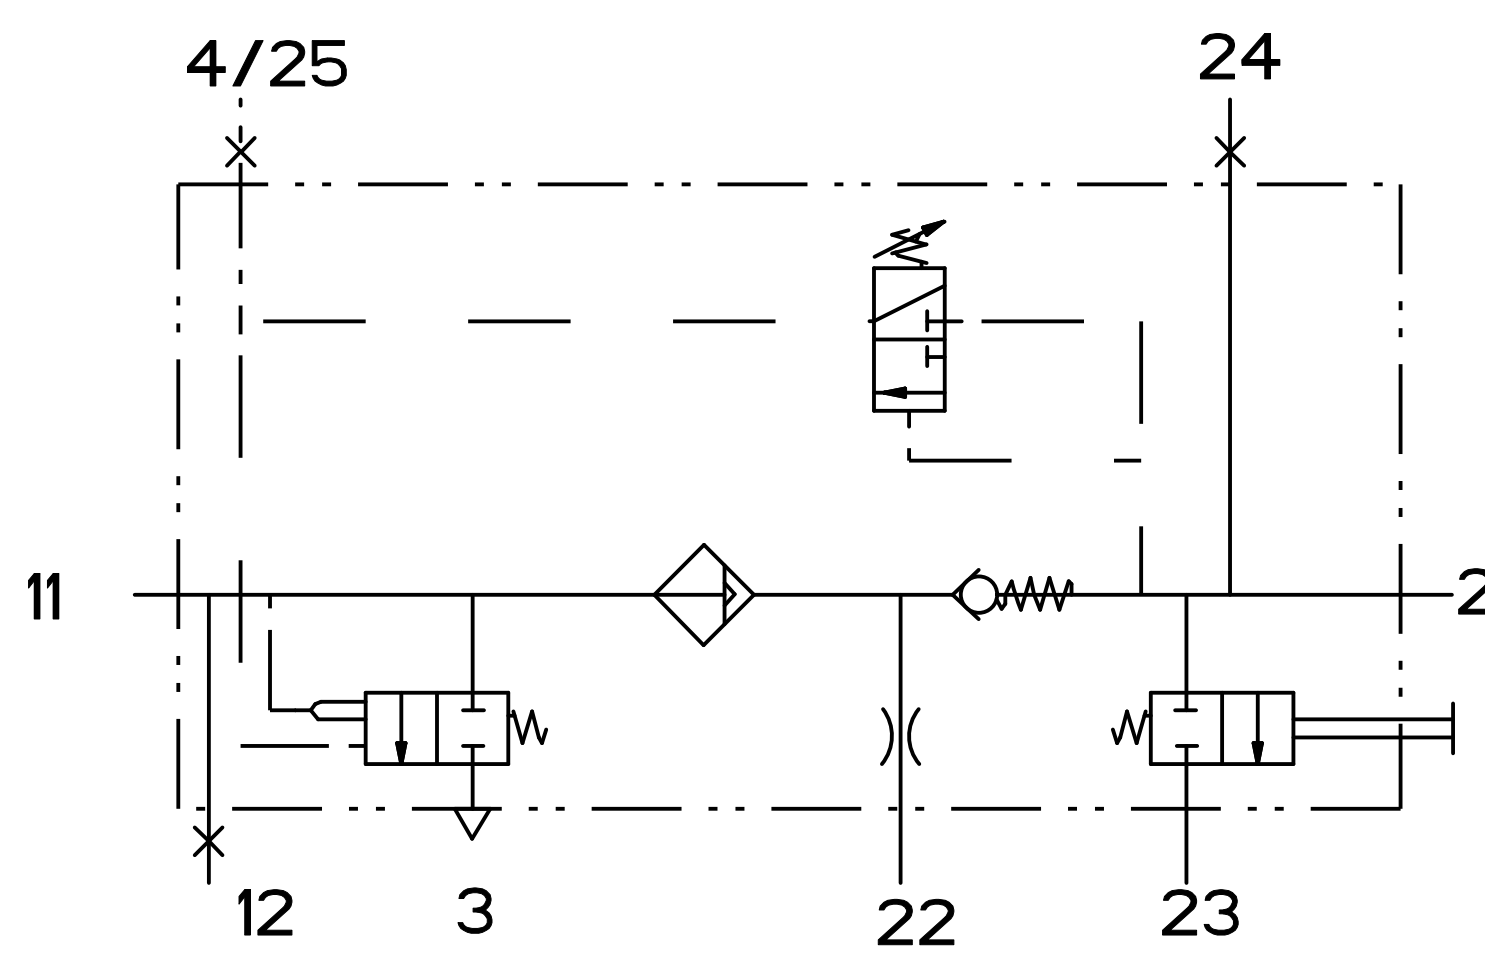

- TECHNICAL DATA:
1. MEDIUM : COMPRESSED AIR
 2. WORKING PRESSURE : $12.5^{+2.5}$ BAR
 3. OPERATING TEMPERATURE RANGE : $-40^{\circ}\text{C} \dots +80^{\circ}\text{C}$
 4. CUT OUT PRESSURE : 10 ± 0.2 BAR
 5. HEATING VOLTAGE : 24 VDC
 6. OPERATING RANGE TO CUT-IN : 0.5 BAR ~ 1 BAR

PORT	THREAD	TORQUE (Nm)
11	M22x1.5	53
12	M12x1.5	21
22	M16x1.5 VOSS	34
24	M22x1.5 VOSS	53
①	M12x1.5	21
②	ISO 15170 A1- 2.1.1.Ag/K3	

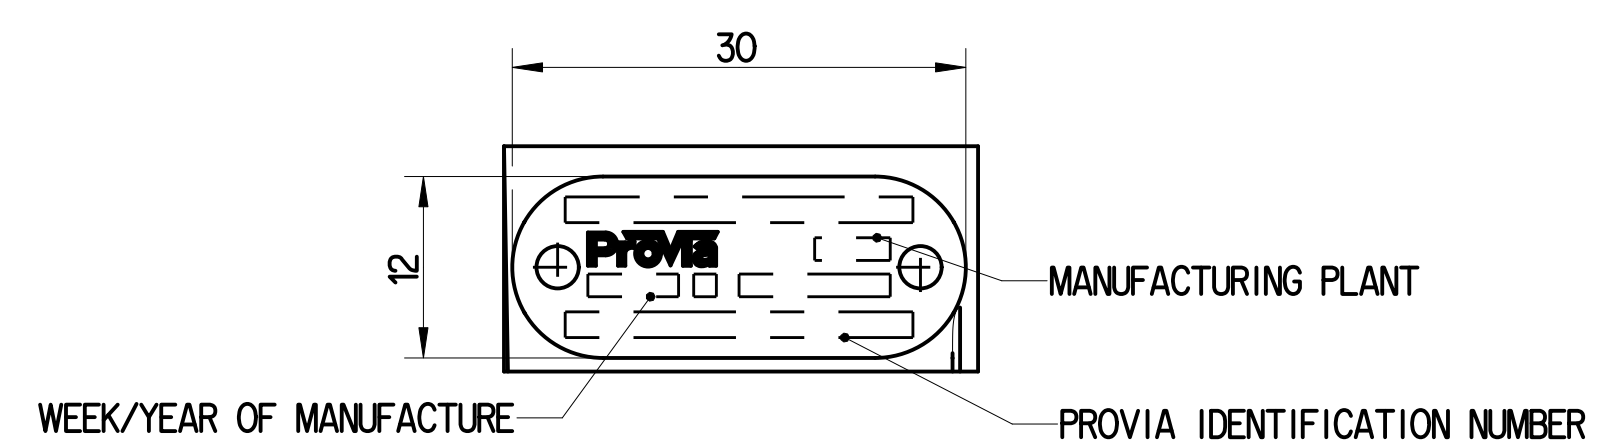

General Specification: ISO 8006, AED-334-1, Size ISO 14400 L1	Copyright © 2025	Provia
Further Technical Data: Product Specification	Date: 2025-03-14	System: AIR DRYER
Doc. Code: 0305	Sheet: 1 To 8	Doc. Code: Language: Sheet
General Tolerances: AED-360	2025-03-17	Provia
Range of Nominal Dimensions (± mm)	Material No.	Date of first issue: 2025-03-17
Class 1: ± 50, ± 100, ± 180, ± 400, ± 600	Dimensions in mm	Doc. Code: Language: Sheet
Fine: ± 0.05, ± 0.10, ± 0.15, ± 0.2	4.25 NTS	PRO 122 102 0
Medium: X ± 0.1, ± 0.2, ± 0.3, ± 0.4	Size: 1/1	005 EN
Coarse: ± 0.2, ± 0.3, ± 0.4, ± 0.5, ± 0.6	Size: 1/1	1/1
Trapped Holes acc. AED-150, AED-388	Size: 1/1	1/1
Tolerance class: Applied: Uncontrolled	Size: 1/1	1/1