


SAFETY CHARACTERISTICS	0
SIGNIFICANT CHARACTERISTICS	0
CUSTOMER INTERFACE	2

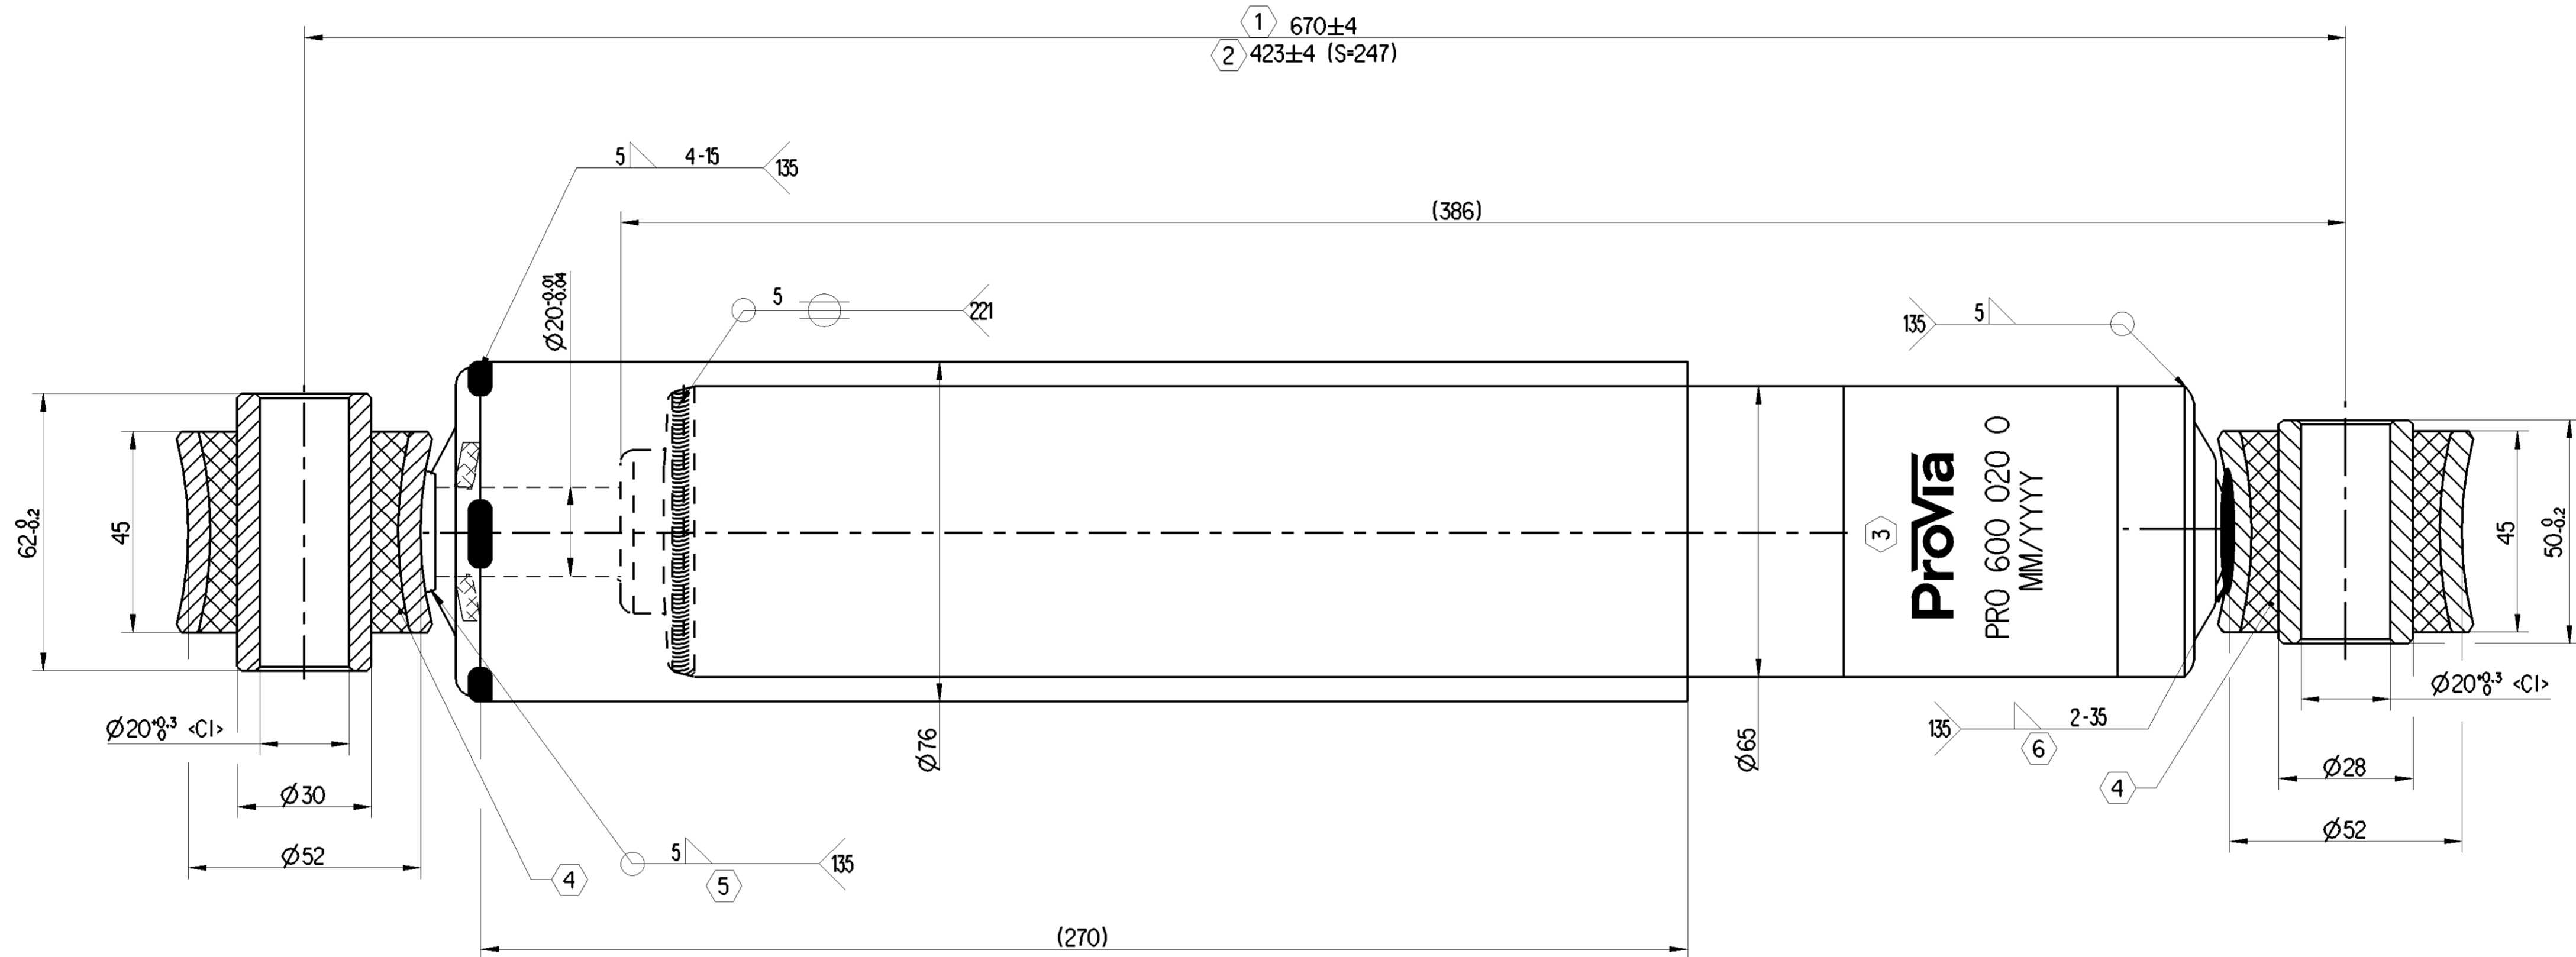

1	MAX.REBOUNDE LENGTH
2	MIN.COMPRESSION LENGTH
3	MARKING DETAILS PROVIA LOGO PROVIA PART NUMBER DATE OF MANUFACTURING
4	HARDNESS OF RUBBER PARTS 60-70 HS
5	WELD STRENGTH 60KN
6	WELD STRENGTH 55KN
	COLOUR: RAL 9005B SEMI-BLACK

Resistance force table of SAMPLE criterion - HYDRAULIC

V (m/s)	0.052	0.131	0.262	0.393	0.524
Rebound (N)	1064	3996/6660	7816	8389	7614/10302
Compression (N)	411	771/1287	1331	1537	1472/1992
S (mm)			100		

General Specifications: ISO 8015, JED-334-1, Size ISO H405 LP		Copyright WABCO®	
Further Technical Data: PRO 600 018 0		Date	Signature
Doc. Code: O35	Sheet: 1 To 7	2023-01-17	Saravanan
General Tolerances JED-261		2023-01-17	
Range of Nominal Dimensions (± mm)		Manivannan	
Class	1) ≤ 50	> 50 ≤ 180	> 180 ≤ 400
Fine	±0.5	±1	±1.5
Medium	±1	±2	±3
Coarse	±2	±3.5	±5
Tapped Holes acc.:-		±3°	
1) Tolerance Class Applied Crossmarked			
Mass	Scale	Material No.	
5.3±1	1:1	PRO 600 020 0	
kg		Doc.Code	Language
		005	EN
Size	CAD System	Techn. Resp.	Replacement for
A 1	CREO	696LAM	
		Date of first issue:	2023-01-17
		Doc.Code	Language
		005	EN
		Sheet	1/1

Non è permesso copiare o riprodurre questo documento, né utilizzare il contenuto a fini commerciali, senza permesso scritto dalla WABCO. È vietata espressamente la ristampa o l'uso non autorizzato. Toute réimpression ou utilisation non autorisée sans la permission écrite de la WABCO est formellement interdite. Toute utilisation non autorisée sera considérée comme une violation des droits de propriété intellectuelle. All rights reserved. No part of this document may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or by any information storage and retrieval system, without the prior written permission of WABCO.